



karmetal
SAWlutions








**VEGA 600x700 S-LINE
AUTONOMOUS
BAND SAW MACHINE**

*Photo may feature machine with optional accessories

VEGA 600x700 S-LINE AUTONOMOUS BAND SAW MACHINE

CUTTING CAPACITY

	0 °
	600 mm
	600 mm
	575 x 620 mm
	400 x 400 mm

TECHNICAL SPECIFICATIONS

Main Motor	: 7, 5 kW
Gearbox	: Bevel Helical PKD 3390 High Efficiency
Hydraulic Motor	: 1, 5 kW
Coolant Motor	: 0, 2 kW
Conveyor Motor	: 0, 37 kW
Swarf Brush Motor	: 0, 25 kW
Material Feeding Stroke	: 750 mm (Multi Indexing)
Servo Feeder Motor	: 750 Watt, 3000 rpm
Bow Servo Motor	: 750 Watt, 3000 rpm
Blade Speed	: 30-140 m/min
Blade Dimensions	: 6.700x54x1, 6 mm
Machine Weight	: 3.800 kg
Machine Dimensions	: 2.000x3.850x2.150

STANDARD ACCESSORIES

15" Industrial PC

- Manual, automatic and intelligent cutting modes
- All cutting datas can be stored and transferred to outsource
- User authority definition
- Cutting information screen
- Work list transfer from PC and mobile devices
- Communication via LAN and Wi-fi
- Access to mobile devices via mobile application



Intelligent Sawing (IPS)

- 1300 different predefined material
- Materials are listed in 6 different standards
- 4 different sawing performance mode (Normal, Blade Saver, High Performance, Ultra Performance)
- Heat treated material defining
- Automatically selection of most appropriate cutting parameters depending on the cutting channel, material grade, heat treatment, sawing mode, blade type and blade TPI according to predefined parameters in the database. Parameters also vary during the operation




Intelligent Cross-section Scanning (ICS)

- In case the workpiece is tangled, it is used to define the shape to the industrial PC
- There is a laser line and an industrial camera. By taking up to 25 photos for every mm while the bow moving down and combining them via a special software (image processing) the shape of the workpiece is taught to the machine.
- It is very beneficial especially for the bundle cutting operations.




Servo Controlled Bow Motion

- Ability to adjust the feed to 1mm/min
- Reducing the load on the ball screw with the use of hydraulic cylinder
- Full control on the cutting pressure
- In case of a problem on the ball screw, hydraulic cylinder locks the system and avoids the bow drop

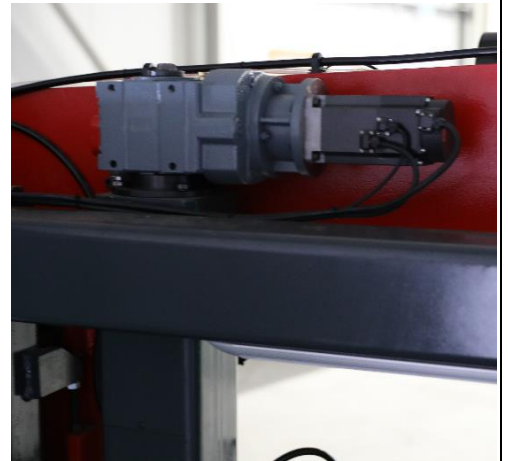

Servo Controlled Feeding Vise

- Servo motor driven feeder vise with 750 mm stroke
- Both front and rear vises are full stroke
- Both front and rear vises have their fixed vises with a small motion
- After the cut is finished, both vises move opposite direction of blade to avoid blade friction
- Front vise bring to cut piece to predefined position (inclined surface or flat surface)

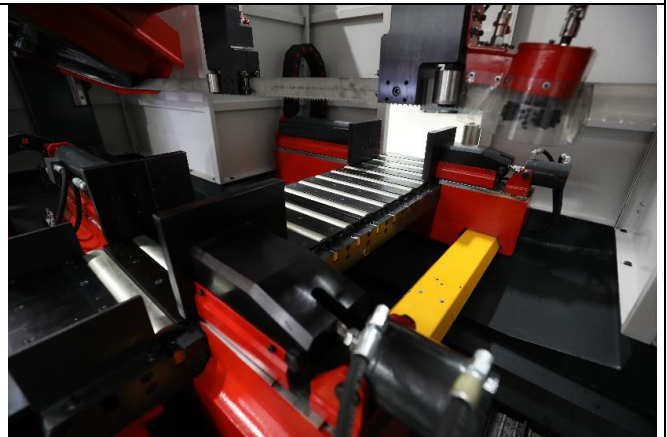

Hydraulic Blade Tensioning

- The blade can be tensioned easily to 300N/mm²
- The blade tension is periodically controlled to avoid any loss of tension



Cover

- Elegant design
- Compatible with international safety regulations (2 contact safety relay etc.)
- Noise and steam isolation



Proximity Switch

- In case of a jam of blade, stops the machine immediately and warns the operator

7 Color LED Display

- Blue when standby
- Green while in operation
- Red while not suitable for operation
- Yellow while there is a warning during operation
- Flashing red while operation is interrupted because of an alarm during operation

Flashing green when operation is finished




Chip Conveyor

Remove swarfs from machine by
Motor driven conveyor.



Blade Cleaning Brush System

- System with two brushes in two sides of the blade
- 900 RPM rotating brushes
- High pressure coolant for cleaning

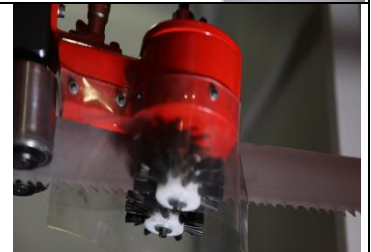

Adjustable Pressures on Vises, Blade Tension and Carbide Guides



2x2 mt Roller Table With Side and Bottom Sheet Cover

- Spaces between the rollers are filled with steel plates
- Barriers of steel in the sides of the roller table



Hydraulic Front and Rear Vises

- All four vise are mobile and hydraulic



Hydraulic Top Clamp For Both Front and Rear Vises

- Top Clamps are separately controlled with the vises
- Full clamping tower type top clamps



OPTIONAL ACCESSORIES

Out of Square Cutting Detector

- Deviation limits can be adjusted by the operator
- Instant deviation is monitored on the 15" screen



Mist Collector



Intelligent Cross-section Scanning (ICS)

- In case the workpiece is tangled, it is used to define the shape to the industrial PC
- There is a laser line and an industrial camera. By taking up to 25 photos for every mm while the bow moving down and combining them via a special software (image processing) the shape of the workpiece is taught to the machine.
- It is very beneficial especially for the bundle cutting operations.



Fully Automated Material Feed System

- Additional to standard roller tables special material feeding systems can be supplied:
- Motorized roller feeders in required length
- Servo feed systems in required length
- Cross conveyors to shift the material between conveyors



Laser Line Indicator



Micro Molecular Coolant System



TERMS

Delivery (After Receipt of written PO) :

Type of Delivery : **Exwork**

WARRANTY CONDITIONS

The machine is under the warranty of KARMETAL LTD. ŞTİ. For a period of 2 years for mechanical parts, 1 year for electric and electronic parts from the date of purchase. This warranty is subject to all of the terms and conditions listed below:

1. This warranty is valid only if the **Warranty Registration Form** is filled in and returned to the manufacturer or its authorized dealer within **two months after the** date of purchase.
2. The obligation of the manufacturer under this warranty shall be limited to repairing or replacing components which proves defective and which our examination shall disclose to our satisfaction to be defective.
3. Defects due to improper operation, misuse, neglect, alteration, irregular voltage conditions, inadequate wiring, improper installation (**all electrical and electronic components, all electrical motors etc.**) and due to accidents or any damage caused by transportation, flood, fire, natural disasters, theft are not included in this warranty and are strictly the responsibility of the purchaser.
4. Any part returned to KARMETAL or its authorized dealer under the terms of this warranty shall be on the basis of transportation charges prepaid by the customer and must be accompanied by a record of the machine model code and serial number.
5. This warranty does not apply to the following components; band saw blade, blade pressure pads or brackets and blade guide bearings **because of being consumables**.
6. Manufacturer and authorized dealer cannot be blamed within maximum repair period for the material or moral damage. Apart from that act the period as Warranty Conditions and there will not be done any retroactive requirement.



KARMETAL SANAYİ ve TİCARET LİMİTED SİRKETİ

Hanlı Merkez Mah. Hatip Sok. No:32

Arifiye/Sakarya/TURKEY

Phone: +90 264 276 59 16

Fax: +90 264 276 59 19

www.karmetal.com.trsales@karmetal.com.tr

Machine videos are available on:

