



Rivelgas Combi

TECHNICAL INFORMATION

		Range	Resolution	Low sensitivity
0-100%	*LEL	1-100 % LEL	1%	0,1%
0-100% VOL	*CH ₄	1-100% VOL	1%	0,1%
0-10.000 PPM	*CH ₄	1-1000 PPM/1000-1%	5 PPM / 100 PPM	1 PPM
0-30%	O ₂	0-30%	0,1%	1%
0-2.000 PPM	CO	0-2000PPM	1PPM	5 PPM
0-10.000 PPM	H ₂	0-1000 PPM/ 1000-1%	5 PPM/100 PPM	1 PPM
0-5% VOL	H ₂	0 -5% VOL	0,1%	0,1%
0-100 PPM 5% VOL	He	0-5%	100 PPM	100 PPM

SUCTION SYSTEM

Suction system	Membrane pump
Capacity of suction	0.6 l/min.


CALIBRATION

Periodical calibration	Every 12 month (as ISO Standard) at HUBERG or service center authorized by HUBERG
Calibration with	With certified bottle

POWER SUPPLY

Power Supply	Rechargeable NiMH batteries
Recharging of batteries	With Huberg battery charger (to be carried out in a safe area)
Autonomy	More than 12 hours under normal working conditions

CERTIFICATION

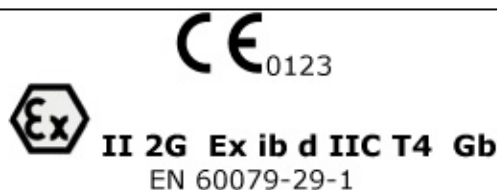

GENERAL TECHNICAL DATA

Environmental working condition	<input type="checkbox"/> temperature	-25 ÷ 50°C
	<input type="checkbox"/> humidity	< 95%
Environmental storage condition	<input type="checkbox"/> temperature	-40 ÷ 60°C
	<input type="checkbox"/> humidity	< 95%
Size (L x W x H)	290 x 70 x 33 mm	
Weight	450 g	