



Level



Pressure



Flow



Temperature

Liquid
Analysis

Registration

Systems
Components

Services



Solutions

Technical Information

Proline Promag 10L

Electromagnetic Flow Measuring System

Flow measurement of liquids

in water or wastewater applications



Application

Electromagnetic flowmeter for bidirectional measurement of liquids with a minimum conductivity of $\geq 50 \mu\text{S}/\text{cm}$:

- Drinking water
- Wastewater
- Sewage sludge
- Flow measurement up to 162000 m³/h (713000 gal/min)
- Fluid temperature up to +90 °C (+194 °F)
- Process pressures up to 16 bar (232 psi)
- Lengths in accordance with DVGW/ISO

Application-specific lining of the measuring pipe from polyurethane, hard rubber or PTFE with the following drinking water permissions:

- KTW
- WRAS
- NSF
- ACS

Your benefits

Promag measuring devices offer you cost-effective flow measurement with a high degree of accuracy for a wide range of process conditions.

The uniform Proline transmitter concept comprises:

- High degree of reliability and measuring stability
- Uniform operating concept

The tried-and-tested Promag sensors offer:

- No pressure loss
- Not sensitive to vibrations
- Simple installation and commissioning

Table of contents


Function and system design	3	Measuring tube specifications	33
Measuring principle	3	Material	35
Measuring system	3	Material load diagram	35
Input	3	Fitted electrodes	37
Measured variable	3	Process connections	37
Measuring ranges	3	Surface roughness	37
Operable flow range	3	Human interface	37
Output	4	Display elements	37
Output signal	4	Operating elements	37
Signal on alarm	4	Remote operation	37
Load	4	Certificates and approvals	37
Low flow cutoff	4	CE mark	37
Galvanic isolation	4	C-tick mark	37
Power supply	4	Drinking water approval	37
Electrical connection, measuring unit	4	Other standards and guidelines	38
Electrical connection, terminal assignment	5	Ordering information	38
Electrical connection, remote version	5	Accessories	38
Supply voltage (power supply)	5	Documentation	38
Cable entry	5	Registered trademarks	38
Remote version cable specifications	6		
Power consumption	6		
Power supply failure	6		
Potential equalization	7		
Performance characteristics	8		
Reference operating conditions	8		
Maximum measured error	8		
Repeatability	8		
Operating conditions: Installations	9		
Installation instructions	9		
Inlet and outlet run	12		
Adapters	13		
Length of connecting cable	14		
Operating conditions: Environment	15		
Ambient temperature range	15		
Storage temperature	15		
Degree of protection	15		
Shock and vibration resistance	15		
Electromagnetic compatibility (EMC)	15		
Operating conditions: Process	16		
Medium temperature range	16		
Conductivity	16		
Medium pressure range (nominal pressure)	16		
Pressure tightness	16		
Limiting flow	16		
Pressure loss	18		
Mechanical construction	19		
Design, dimensions	19		
Weight	30		

Function and system design

Measuring principle

Following *Faraday's law of magnetic induction*, a voltage is induced in a conductor moving through a magnetic field.

In the electromagnetic measuring principle, the flowing medium is the moving conductor. The voltage induced is proportional to the flow velocity and is supplied to the amplifier by means of two measuring electrodes. The flow volume is calculated by means of the pipe cross-sectional area. The DC magnetic field is created through a switched direct current of alternating polarity.

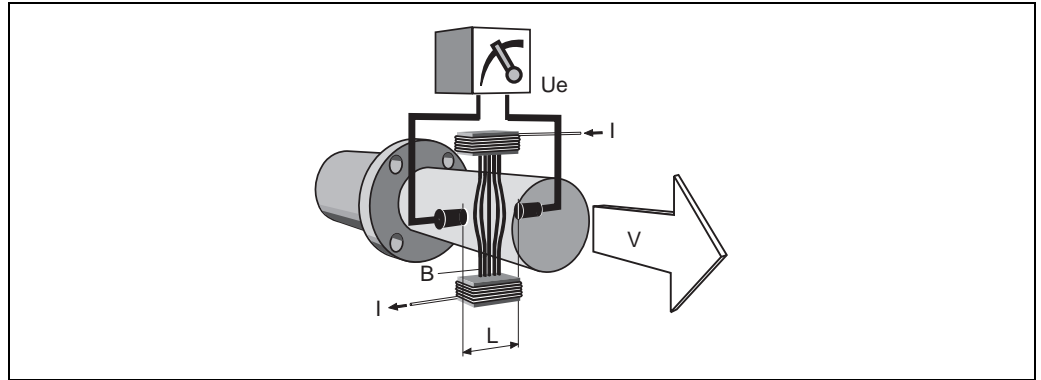

$$U_e = B \cdot L \cdot v$$

$$Q = A \cdot v$$

- U_e* Induced voltage
B Magnetic induction (magnetic field)
L Electrode spacing
v Flow velocity
Q Volume flow
A Pipe cross-section
I Current strength

Measuring system

The measuring system consists of a transmitter and a sensor.

Two versions are available:

- Compact version: Transmitter and sensor form a mechanical unit.
- Remote version: Sensor is mounted separate from the transmitter.

Transmitter:

- Promag 10 (key operation, two-line, unilluminated display)

Sensor:

- Promag L
 - DN 50 to 300 (2 to 12")
 - DN 350 to 2400 (14 to 90")



Caution!

To avoid corrosion, the sensor and process connection material must be selected considering the environmental and process conditions.

Input

Measured variable

Flow velocity (proportional to induced voltage)

Measuring ranges

Measuring ranges for liquids
 Typically $v = 0.01$ to 10 m/s (0.03 to 33 ft/s) with the specified accuracy

Operable flow range

Over 1000 : 1

Output

Output signal

Current output

- Galvanically isolated
- Active: 4 to 20 mA, $R_L < 700 \Omega$ (for HART: $R_L \geq 250 \Omega$)
- Full scale value adjustable
- Temperature coefficient: typ. $2 \mu\text{A}/^\circ\text{C}$, resolution: $1.5 \mu\text{A}$

Pulse/status output

- Galvanically isolated
- Passive: 30 V DC / 250 mA
- Open collector
- Can be configured as:
 - Pulse output: Pulse value and pulse polarity can be selected, max. pulse width adjustable (5 to 2000 ms), pulse frequency max. 100 Hz
 - Status output: for example, can be configured for error messages, empty pipe detection, flow recognition, limit value

Signal on alarm

- Current output → Failsafe mode can be selected (e.g. in accordance with NAMUR Recommendation NE 43)
- Pulse output → Failsafe mode can be selected
- Status output → "Not conductive" in the event of fault or power supply failure

Load

→ Section "output signal"

Low flow cutoff


Switch-on points for low flow are selectable.

Galvanic isolation

All circuits for inputs, outputs and power supply are galvanically isolated from each other.

Power supply

Electrical connection, measuring unit

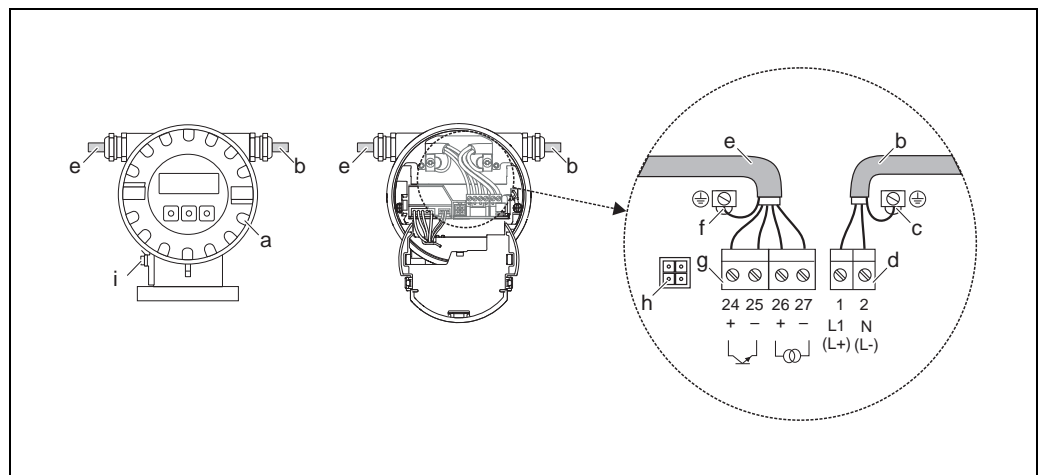


Connecting the transmitter (aluminum field housing), cable cross-section max. 2.5 mm^2 (14 AWG)

- a Electronics compartment cover
- b Power supply cable
- c Ground terminal for power supply cable
- d Terminal connector for power supply cable
- e Signal cable
- f Ground terminal for signal cable
- g Terminal connector for signal cable
- h Service connector
- i Ground terminal for potential equalization

Electrical connection, terminal assignment

Order version	Terminal No.					
	24 (+)	25 (-)	26 (+)	27 (-)	1 (L1/L+)	2 (N/L-)
10***_*****A	Pulse/status output		HART current output		Power supply	
Functional values	→ 4, Section "Output signal"				→ Section "Supply voltage"	

Electrical connection, remote version

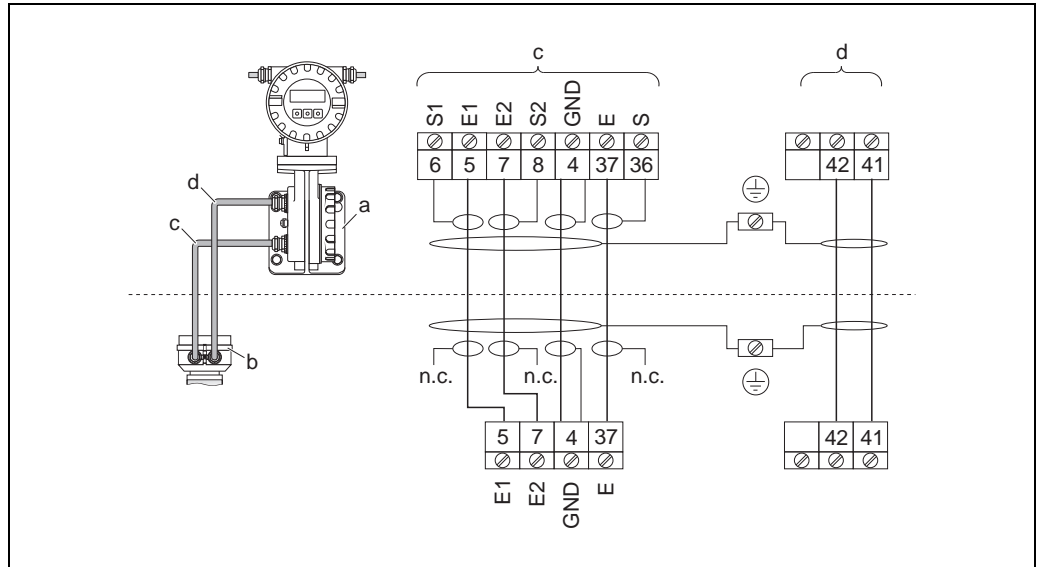

Connecting the remote version

- a Wall-mount housing connection compartment
- b Sensor connection housing cover
- c Signal cable
- d Coil current cable
- n.c. Not connected, insulated cable shields

Terminal numbers and cable colors:
 5/6 = brown, 7/8 = white, 4 = green, 37/36 = yellow

Supply voltage (power supply)

- 85 to 250 V AC, 45 to 65 Hz
- 20 to 28 V AC, 45 to 65 Hz
- 11 to 40 V DC

Cable entry

- Power supply and signal cables (inputs/ outputs):**
- Cable entry M20 × 1.5 (8 to 12 mm / 0.31 to 0.47")
 - Thread for cable entries, 1/2" NPT, G 1/2"
- Connecting cable for remote version:**
- Cable entry M20 × 1.5 (8 to 12 mm / 0.31 to 0.47")
 - Thread for cable entries, 1/2" NPT, G 1/2"


Remote version cable specifications

Coil cable

- $2 \times 0.75 \text{ mm}^2$ (18 AWG) PVC cable with common, braided copper shield ($\varnothing \sim 7 \text{ mm} / 0.28''$)
- Conductor resistance: $\leq 37 \text{ } \Omega/\text{km}$ ($\leq 0.011 \text{ } \Omega/\text{ft}$)
- Capacitance core/core, shield grounded: $\leq 120 \text{ pF/m}$ ($\leq 37 \text{ pF/ft}$)
- Operating temperature: -20 to $+80 \text{ }^\circ\text{C}$ (-68 to $+176 \text{ }^\circ\text{F}$)
- Cable cross-section: max. 2.5 mm^2 (14 AWG)
- Test voltage for cable insulation: $\leq 1433 \text{ AC r.m.s. } 50/60 \text{ Hz}$ or $\geq 2026 \text{ V DC}$

Signal cable

- $3 \times 0.38 \text{ mm}^2$ (20 AWG) PVC cable with common, braided copper shield ($\varnothing \sim 7 \text{ mm} / 0.28''$) and individual shielded cores
- With empty pipe detection (EPD): $4 \times 0.38 \text{ mm}^2$ (20 AWG) PVC cable with common, braided copper shield ($\varnothing \sim 7 \text{ mm} / 0.28''$) and individual shielded cores
- Conductor resistance: $\leq 50 \text{ } \Omega/\text{km}$ ($\leq 0.015 \text{ } \Omega/\text{ft}$)
- Capacitance core/shield: $\leq 420 \text{ pF/m}$ ($\leq 128 \text{ pF/ft}$)
- Operating temperature: -20 to $+80 \text{ }^\circ\text{C}$ (-68 to $+176 \text{ }^\circ\text{F}$)
- Cable cross-section: max. 2.5 mm^2 (14 AWG)

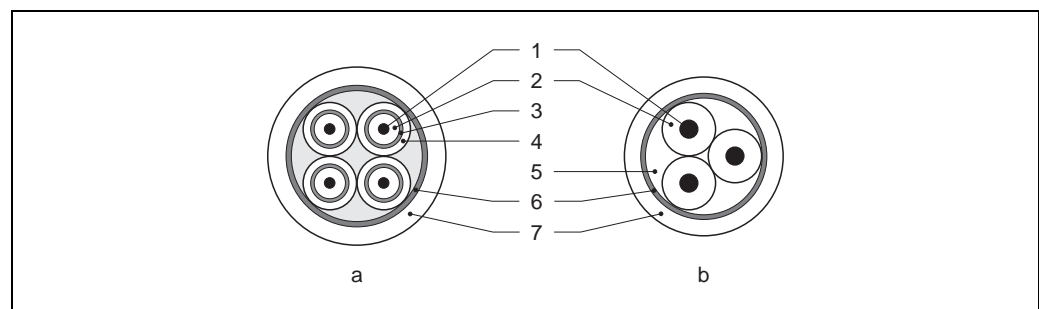

- a *Signal cable*
 b *Coil current cable*
- 1 *Core*
 2 *Core insulation*
 3 *Core shield*
 4 *Core jacket*
 5 *Core reinforcement*
 6 *Cable shield*
 7 *Outer jacket*

Operation in zones of severe electrical interference

The measuring device complies with the general safety requirements in accordance with EN 61010 and the EMC requirements of IEC/EN 61326.



Caution!

Grounding is by means of the ground terminals provided for the purpose inside the connection housing. Ensure that the stripped and twisted lengths of cable shield to the ground terminal are as short as possible.

Power consumption

- 85 to 250 V AC: $< 12 \text{ VA}$ (incl. sensor)
- 20 to 28 V AC: $< 8 \text{ VA}$ (incl. sensor)
- 11 to 40 V DC: $< 6 \text{ W}$ (incl. sensor)

Switch-on current:

- Max. 16 A ($< 5 \text{ ms}$) for 250 V AC
- Max. 5.5 A ($< 5 \text{ ms}$) for 28 V AC
- Max. 3.3 A ($< 5 \text{ ms}$) for 24 V DC

Power supply failure

Lasting min. $\frac{1}{2}$ cycle frequency: EEPROM saves measuring system data

Potential equalization



Warning!


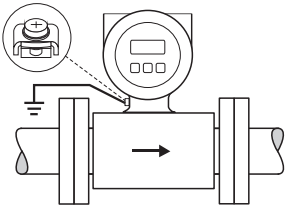
The measuring system must be included in the potential equalization.

Perfect measurement is only ensured when the fluid and the sensor have the same electrical potential. This is ensured by the reference electrode integrated in the sensor as standard.


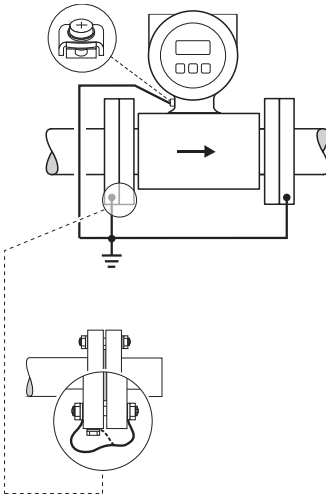
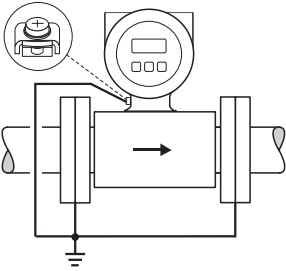
The following should also be taken into consideration for potential equalization:


- Internal grounding concepts in the company
- Operating conditions, such as the material/ grounding of the pipes (see table)

Standard situation

Operating conditions	Potential equalization
<p>When using the measuring device in a:</p> <ul style="list-style-type: none"> ■ Metal, grounded pipe <p>Potential equalization takes place via the ground terminal of the transmitter.</p> <p> Note! When installing in metal pipes, we recommend you connect the ground terminal of the transmitter housing with the piping.</p>	 <p style="text-align: right;">A0010831</p> <p style="text-align: center;"><i>Via the ground terminal of the transmitter</i></p>

Special situations

Operating conditions	Potential equalization
<p>When using the measuring device in a:</p> <ul style="list-style-type: none"> ■ Metal pipe that is not grounded <p>This connection method also applies in situations where:</p> <ul style="list-style-type: none"> ■ Customary potential equalization cannot be ensured. ■ Excessively high equalizing currents can be expected. <p>Both sensor flanges are connected to the pipe flange by means of a ground cable (copper wire, at least 6 mm² / 0.0093 in²) and grounded. Connect the transmitter or sensor connection housing, as applicable, to ground potential by means of the ground terminal provided for the purpose.</p> <p>The ground cable is mounted directly on the conductive flange coating with the flange screws.</p> <p> Note! The ground cable for flange-to-flange connections can be ordered separately as an accessory from Endress+Hauser.</p>	 <p style="text-align: right;">A0011567</p> <p style="text-align: center;"><i>Via the ground terminal of the transmitter and the flanges of the pipe</i></p>
<p>When using the measuring device in a:</p> <ul style="list-style-type: none"> ■ Plastic pipe ■ Pipe with insulating lining <p>This connection method also applies in situations where:</p> <ul style="list-style-type: none"> ■ Customary potential equalization cannot be ensured. ■ Excessively high equalizing currents can be expected. <p>Potential equalization takes place using additional ground disks, which are connected to the ground terminal via a ground cable (copper wire, at least 6 mm² / 0.0093 in²). When installing the ground disks, please comply with the enclosed Installation Instructions.</p>	 <p style="text-align: right;">A0010833</p> <p style="text-align: center;"><i>Via the ground terminal of the transmitter and the optionally available ground disks</i></p>

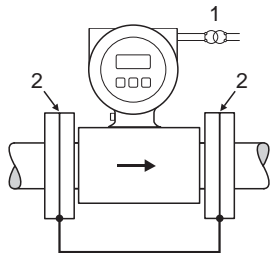Operating conditions	Potential equalization
<p>When using the measuring device in a:</p> <ul style="list-style-type: none"> ■ Pipe with a cathodic protection unit <p>The device is installed potential-free in the pipe. Only the two flanges of the pipe are connected with a ground cable (copper wire, at least 6 mm² / 0.0093 in²). Here, the ground cable is mounted directly on the conductive flange coating with flange screws.</p> <p>Note the following when installing:</p> <ul style="list-style-type: none"> ■ The applicable regulations regarding potential-free installation must be observed. ■ There should be no electrically conductive connection between the pipe and the device. ■ The mounting material must withstand the applicable torques. 	 <p style="text-align: right;">A0010834</p> <p><i>Potential equalization and cathodic protection</i></p> <p>1 Power supply isolation transformer 2 Electrically isolated</p>

Performance characteristics

Reference operating conditions

As per DIN EN 29104 and VDI/VDE 2641:

- Fluid temperature: +28 °C ± 2 K (+82 °F ± 2 K)
- Ambient temperature: +22 °C ± 2 K (+72 °F ± 2 K)
- Warm-up period: 30 minutes


Installation conditions:

- Inlet run > 10 × DN
- Outlet run > 5 × DN
- Sensor and transmitter grounded.
- The sensor is centered in the pipe.

Maximum measured error

- Current output: also typically ± 5 µA
- Pulse output: ±0.5% o.r. ± 2 mm/s (±0.5% o.r. ± 0.08 in/s) (o.r. = of reading)

Fluctuations in the supply voltage do not have any effect within the specified range.

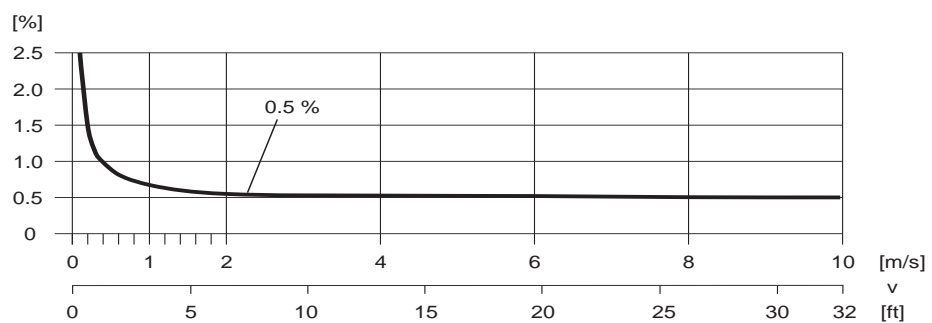

Max. measured error in % of reading

A0003200

Repeatability

Max. ±0.2% o.r. ± 2 mm/s (±0.2% o.r. ± 0.08 in/s) (o.r. = of reading)

Operating conditions: Installations


Installation instructions

Mounting location

Entrained air or gas bubble formation in the measuring tube can result in an increase in measuring errors.

Avoid the following installation locations in the pipe:

- Highest point of a pipeline. Risk of air accumulating!
- Directly upstream from a free pipe outlet in a vertical pipeline.

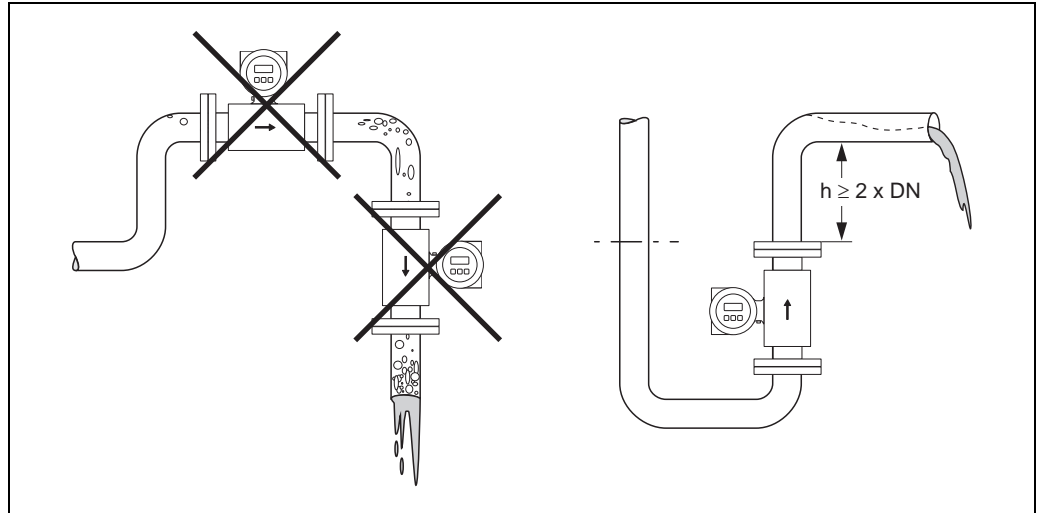


Mounting location

Installation of pumps

Sensors may not be installed on the pump suction side. This precaution is to avoid low pressure and the consequent risk of damage to the lining of the measuring tube. Information on the pressure tightness of the measuring tube lining → 16, Section "Pressure tightness".

Pulsation dampers may be needed when using piston pumps, piston diaphragm pumps or hose pumps. Information on the shock and vibration resistance of the measuring system → 15, Section "Shock and vibration resistance".

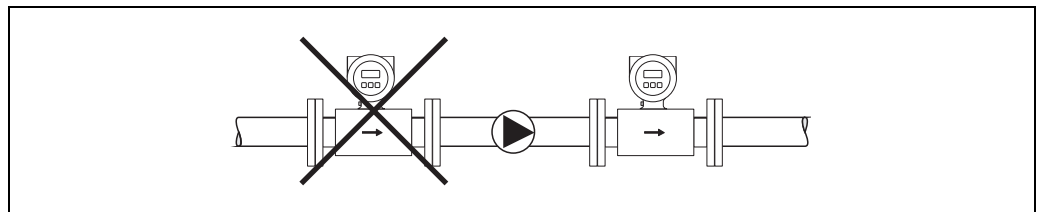

Installation of pumps

Partially filled pipes


Partially filled pipes with gradients necessitate a drain-type configuration.

The empty pipe detection function (EPD) provides additional security in detecting empty or partially filled pipes.



Caution!

Risk of solids accumulating. Do not install the sensor at the lowest point in the drain. It is advisable to install a cleaning valve.

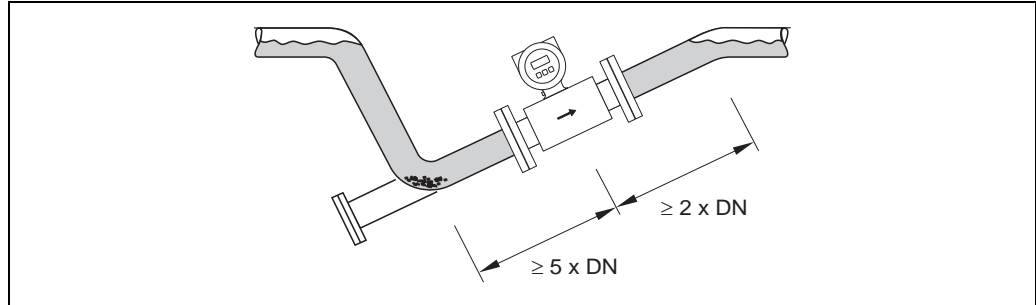


A0003204

Installation with partially filled pipes

Down pipes

Install a siphon or a vent valve downstream of the sensor in down pipes $h \geq 5 \text{ m}$ (16.4 ft). This precaution is to avoid low pressure and the consequent risk of damage to the lining of the measuring tube. This measure also prevents the liquid current stopping in the pipe which could cause air locks. Information on the pressure tightness of the measuring tube lining → 16, Section "Pressure tightness".

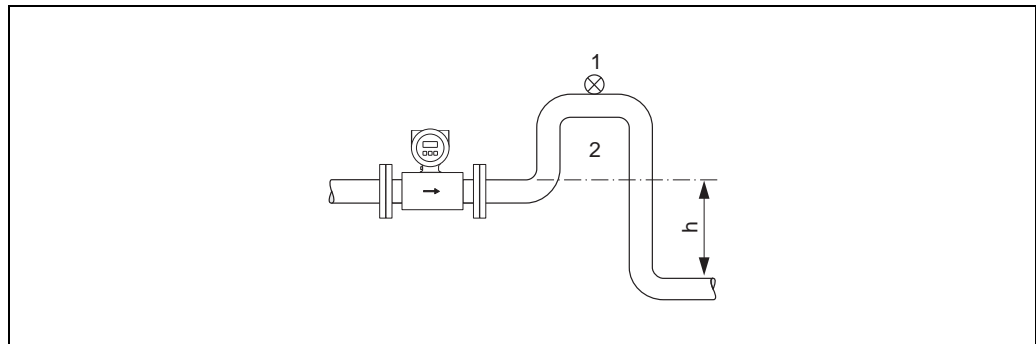

A0008157

Installation measures for vertical pipes


- 1 Vent valve
- 2 Pipe siphon
- h Length of the down pipe

Orientation

An optimum orientation helps avoid gas and air accumulations and deposits in the measuring tube. However, the measuring device also offers the additional function of empty pipe detection (EPD) for detecting partially filled measuring tubes or if outgassing fluids or fluctuating operating pressures are present.

Vertical orientation

This is the ideal orientation for self-emptying piping systems and for use in conjunction with empty pipe detection.

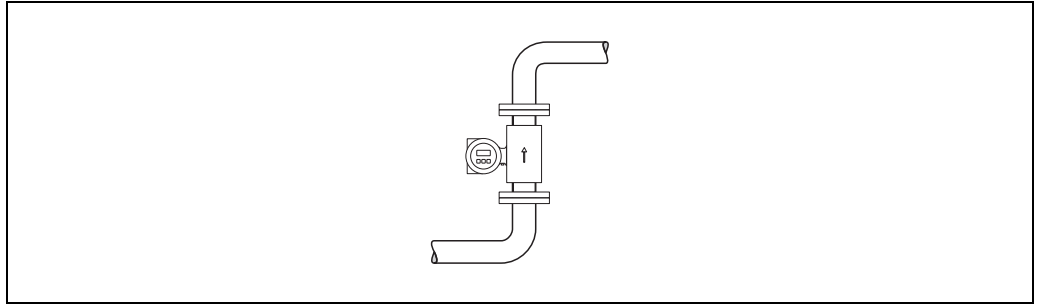

A0008158

Vertical orientation


Horizontal orientation

The measuring electrode axis should be horizontal. This prevents brief insulation of the two measuring electrodes by entrained air bubbles.



Caution!

Empty pipe detection only works correctly with horizontal orientation if the transmitter housing is facing upwards. Otherwise there is no guarantee that empty pipe detection will respond if the measuring tube is only partially filled or empty.

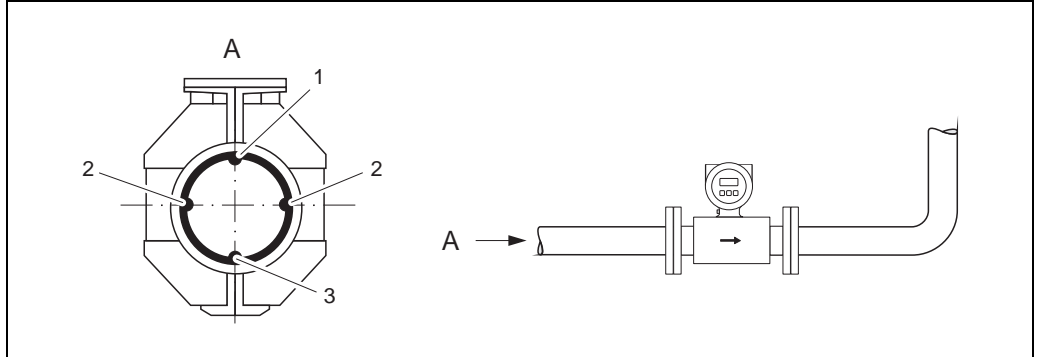

A0003207

Horizontal orientation


- 1 EPD electrode for empty pipe detection
- 2 Measuring electrodes for signal detection
- 3 Reference electrode for potential equalization

Vibrations

Secure the piping and the sensor if vibration is severe.

**Caution!**

If vibrations are too severe, we recommend the sensor and transmitter be mounted separately. Information on the permitted shock and vibration resistance → 15, Section "Shock and vibration resistance".

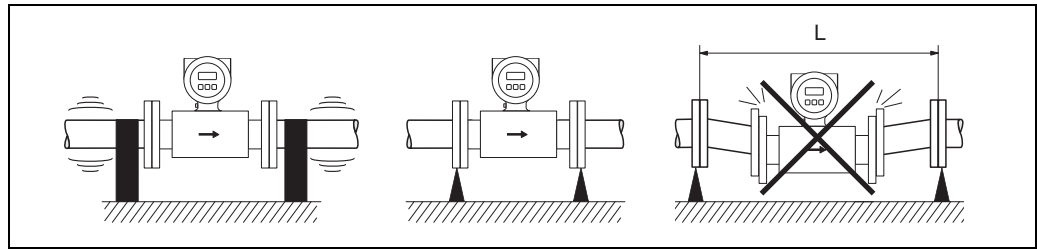

Measures to prevent vibration of the measuring device


$L > 10 \text{ m (33 ft)}$

Inlet and outlet run

If possible, install the sensor well clear of assemblies such as valves, T-pieces, elbows etc.

Note the following inlet and outlet runs to comply with measuring accuracy specifications:

- Inlet run: $\geq 5 \times \text{DN}$
- Outlet run: $\geq 2 \times \text{DN}$

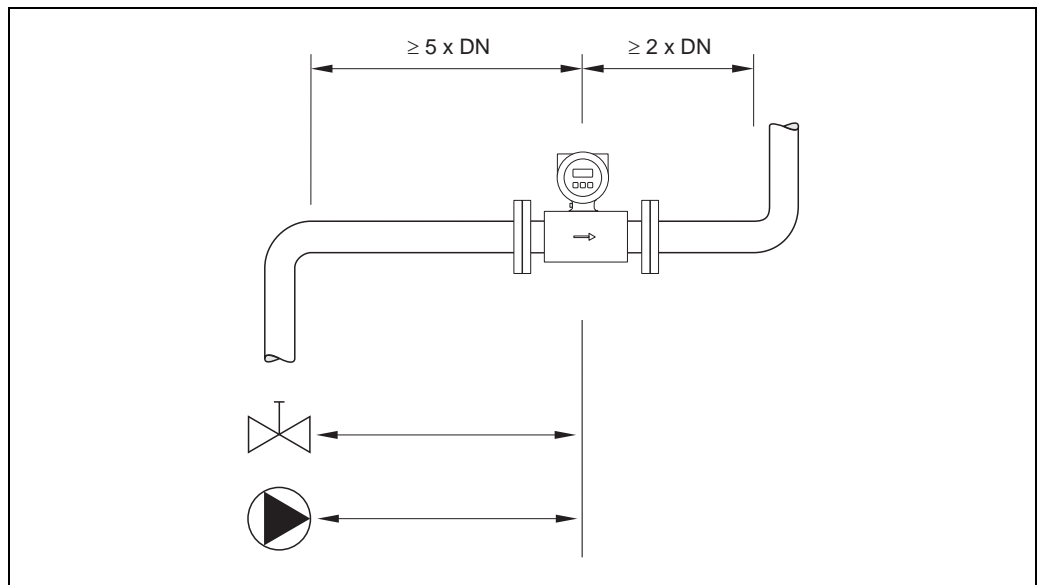

Inlet and outlet run

Adapters


Suitable adapters to DIN EN 545 (double-flange reducers) can be used to install the sensor in larger-diameter pipes. The resultant increase in the rate of flow improves measuring accuracy with very slow-moving fluids. The nomogram shown here can be used to calculate the pressure loss caused by reducers and expanders.



Note!

The nomogram only applies to liquids of viscosity similar to water.

1. Calculate the ratio of the diameters d/D .
2. From the nomogram read off the pressure loss as a function of flow velocity (downstream from the reduction) and the d/D ratio.

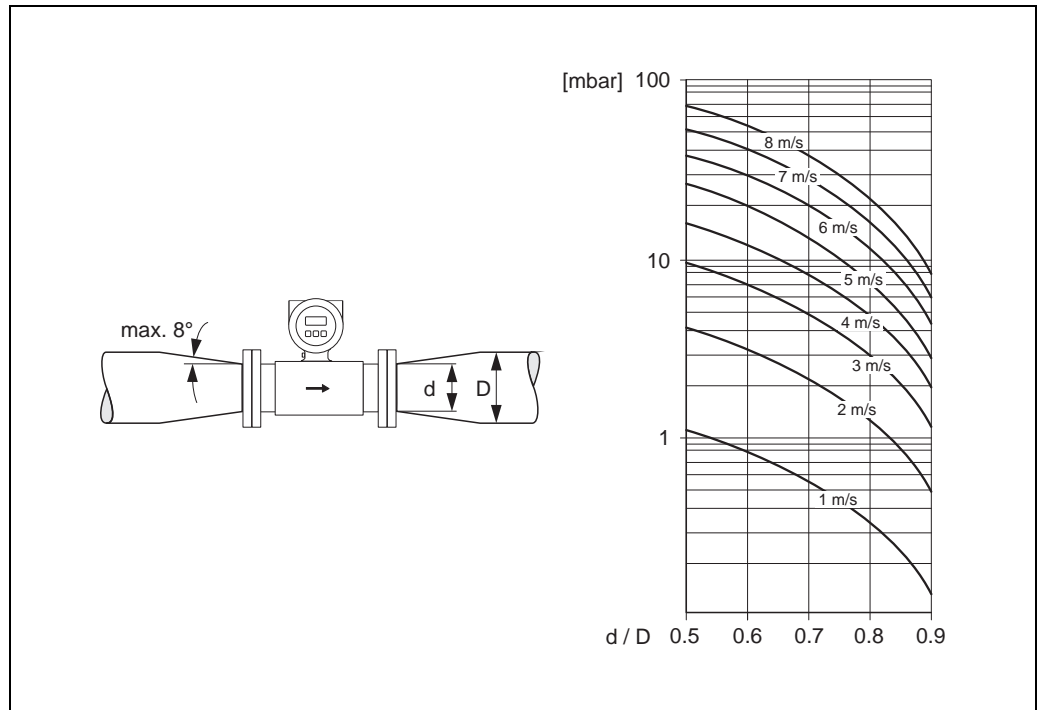


Pressure loss due to adapters

A0003213

Length of connecting cable

When mounting the remote version, please note the following to achieve correct measuring results:

- Fix cable run or lay in armored conduit. Cable movements can falsify the measuring signal especially in the case of low fluid conductivities.
- Route the cable well clear of electrical machines and switching elements.
- If necessary, ensure potential equalization between sensor and transmitter.
- The permitted cable length L_{max} is determined by the fluid conductivity. A minimum conductivity of $50 \mu\text{S}/\text{cm}$ is needed for all fluids.
- When the empty pipe detection function is switched on (EPD), the maximum connecting cable length is 10 m (33 ft).

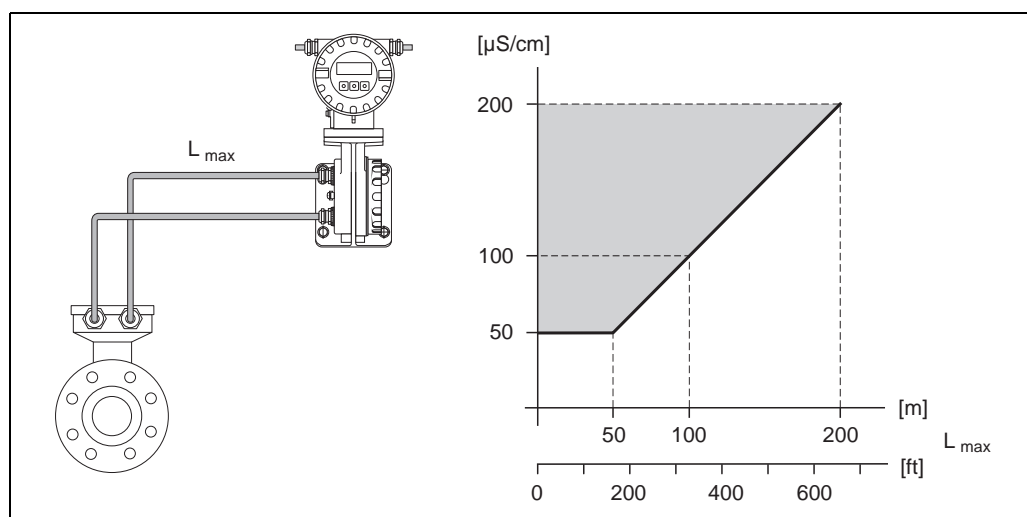

Permitted length of connecting cable for remote version

Area marked in gray = permitted range; L_{max} = length of connecting cable in [m] ([ft]); fluid conductivity in [$\mu\text{S}/\text{cm}$]

Operating conditions: Environment

Ambient temperature range

Transmitter


- -20 to +60 °C (-4 to +140 °F)

Sensor

- Flange material carbon steel: -10 to +60 °C (14 to +140 °F)
- Flange material stainless steel (DN ≤ 300): -40 to +60 °C (-40 to +140 °F)



Caution!

The permitted temperature range of the measuring tube lining may not be undershot or overshot (→  16, Section "Medium temperature range").

Please note the following points:

- Install the device in a shady location. Avoid direct sunlight, particularly in warm climatic regions.
- The transmitter must be mounted separate from the sensor if both the ambient and fluid temperatures are high.

Storage temperature

The storage temperature corresponds to the operating temperature range of the measuring transmitter and the appropriate measuring sensors.



Caution!

- The measuring device must be protected against direct sunlight during storage in order to avoid unacceptably high surface temperatures.
- A storage location must be selected where moisture does not collect in the measuring device. This will help prevent fungus and bacteria infestation which can damage the liner.

Degree of protection

- Standard: IP 67 (NEMA 4X) for transmitter and sensor.
- Optional: IP 68 (NEMA 6P) for sensor for remote version (DN ≤ 300 only with stainless steel flange).
- For information regarding applications where the device is buried directly in the soil or is installed in a flooded wastewater basin please contact your local Endress+Hauser Sales Center.

Shock and vibration resistance

Acceleration up to 2 g following IEC 600 68-2-6

Electromagnetic compatibility (EMC)

- As per IEC/EN 61326 as well as NAMUR Recommendation NE 21
- Emission: to limit value for industry EN 55011

Operating conditions: Process

Medium temperature range

- 0 to +80 °C (+32 to +176 °F) for hard rubber (DN 350 to 2400)
- -20 to +50 °C (-4 to +122 °F) for polyurethane (DN 50 to 1200)
- -20 to +90 °C (-4 to +194 °F) for PTFE (DN 50 to 300)

Conductivity



The minimum conductivity is: $\geq 50 \mu\text{S}/\text{cm}$

Note!

In the remote version, the necessary minimum conductivity also depends on the cable length (→ 14, Section "Length of connecting cable").

Medium pressure range (nominal pressure)

- EN 1092-1 (DIN 2501)
 - PN 6 (DN 350 to 2400)
 - PN 10 (DN 200 to 2400)
 - PN 16 (DN 50 to 150)
- EN 1092-1, lap joint flange, stampel plate
 - PN 10 (DN 50 to 300)
- ANSI B 16.5
 - Class 150 (2" to 24")
- AWWA
 - Class D (28" to 90")
- AS2129
 - Table E (350 to 1200)
- AS4087
 - PN 16 (350 to 1200)

Pressure tightness

Measuring tube lining: Polyurethane, hard rubber

Promag L Nominal diameter		Measuring tube lining	Resistance of measuring tube lining to partial vacuum Limit values for abs. pressure [mbar] ([psi]) at various fluid temperatures		
[mm]	[inch]		25 °C 77 °F	50 °C 122 °F	80 °C 176 °F
50 to 1200	2 to 48"	Polyurethane	0	0	-
350 to 2400	14 to 90"	Hard rubber	0	0	0

Measuring tube lining: PTFE

Nominal diameter		Limit values for abs. pressure [mbar] ([psi]) at fluid temperatures:			
[mm]	[inch]	25 °C (77 °F)		90 °C (194 °F)	
		[mbar]	[psi]	[mbar]	[psi]
50	2"	0	0	0	0
65	-	0	0	40	0.58
80	3"	0	0	40	0.58
100	4"	0	0	135	1.96
125	-	135	1.96	240	3.48
150	6"	135	1.96	240	3.48
200	8"	200	2.90	290	4.21
250	10"	330	4.79	400	5.80
300	12"	400	5.80	500	7.25

Limiting flow

The diameter of the pipe and the flow rate determine the nominal diameter of the sensor. The optimum flow velocity is between 2 to 3 m/s (6.5 to 9.8 ft/s). The velocity of flow (v), moreover, has to be matched to the physical properties of the fluid:

- $v < 2 \text{ m/s}$ (6.5 ft/s): for abrasive fluids such as potter's clay, lime milk, ore slurry etc.
- $v > 2 \text{ m/s}$ (6.5 ft/s): for fluids causing build-up such as wastewater sludges etc.

Flow characteristic values (SI units)


Diameter		Recommended flow Min./max. full scale value (v ~ 0.3 or 10 m/s)	Factory settings		
[mm]	[inch]		Full scale value Current output (v ~ 2.5 m/s)	Pulse value (~ 2 pulses/s)	Low flow cut off (v ~ 0.04 m/s)
50	2"	35 to 1100 dm ³ /min	300 dm ³ /min	2.50 dm ³	5 dm ³ /min
65	–	60 to 2000 dm ³ /min	500 dm ³ /min	5.00 dm ³	8 dm ³ /min
80	3"	90 to 3000 dm ³ /min	750 dm ³ /min	5.00 dm ³	12 dm ³ /min
100	4"	145 to 4700 dm ³ /min	1200 dm ³ /min	10.00 dm ³	20 dm ³ /min
125	–	220 to 7500 dm ³ /min	1850 dm ³ /min	15.00 dm ³	30 dm ³ /min
150	6"	20 to 600 m ³ /h	150 m ³ /h	0.025 m ³	2.5 m ³ /h
200	8"	35 to 1100 m ³ /h	300 m ³ /h	0.05 m ³	5.0 m ³ /h
250	10"	55 to 1700 m ³ /h	500 m ³ /h	0.05 m ³	7.5 m ³ /h
300	12"	80 to 2400 m ³ /h	750 m ³ /h	0.10 m ³	10 m ³ /h
350	14"	110 to 3300 m ³ /h	1000 m ³ /h	0.10 m ³	15 m ³ /h
375	15"	140 to 4200 m ³ /h	1200 m ³ /h	0.15 m ³	20 m ³ /h
400	16"	140 to 4200 m ³ /h	1200 m ³ /h	0.15 m ³	20 m ³ /h
450	18"	180 to 5400 m ³ /h	1500 m ³ /h	0.25 m ³	25 m ³ /h
500	20"	220 to 6600 m ³ /h	2000 m ³ /h	0.25 m ³	30 m ³ /h
600	24"	310 to 9600 m ³ /h	2500 m ³ /h	0.30 m ³	40 m ³ /h
700	28"	420 to 13500 m ³ /h	3500 m ³ /h	0.50 m ³	50 m ³ /h
–	30"	490 to 15000 m ³ /h	4000 m ³ /h	0.50 m ³	60 m ³ /h
800	32"	550 to 18000 m ³ /h	4500 m ³ /h	0.75 m ³	75 m ³ /h
900	36"	690 to 22500 m ³ /h	6000 m ³ /h	0.75 m ³	100 m ³ /h
1000	40"	850 to 28000 m ³ /h	7000 m ³ /h	1.00 m ³	125 m ³ /h
–	42"	950 to 30000 m ³ /h	8000 m ³ /h	1,00 m ³	125 m ³ /h
1200	48"	1250 to 40000 m ³ /h	10000 m ³ /h	1.50 m ³	150 m ³ /h
–	54"	1550 to 50000 m ³ /h	13000 m ³ /h	1.50 m ³	200 m ³ /h
1400	–	1700 to 55000 m ³ /h	14000 m ³ /h	2.00 m ³	225 m ³ /h
–	60"	1950 to 60000 m ³ /h	16000 m ³ /h	2.00 m ³	250 m ³ /h
1600	–	2200 to 70000 m ³ /h	18000 m ³ /h	2.50 m ³	300 m ³ /h
–	66"	2500 to 80000 m ³ /h	20500 m ³ /h	2.50 m ³	325 m ³ /h
1800	72"	2850 to 90000 m ³ /h	23000 m ³ /h	3.00 m ³	350 m ³ /h
–	78"	3300 to 100000 m ³ /h	28500 m ³ /h	3.50 m ³	450 m ³ /h
2000	–	3400 to 110000 m ³ /h	28500 m ³ /h	3.50 m ³	450 m ³ /h
–	84"	3700 to 125000 m ³ /h	31000 m ³ /h	4.50 m ³	500 m ³ /h
2200	–	4100 to 136000 m ³ /h	34000 m ³ /h	4.50 m ³	540 m ³ /h
–	90"	4300 to 143000 m ³ /h	36000 m ³ /h	5.00 m ³	570 m ³ /h
2400	–	4800 to 162000 m ³ /h	40000 m ³ /h	5.50 m ³	650 m ³ /h

Flow characteristic values (US units)

Diameter		Recommended flow rate Min./max. full scale value (v ~ 0.3 or 10 m/s)	Factory settings		
[inch]	[mm]		Full scale value Current output (v ~ 2.5 m/s)	Pulse value (~ 2 pulses/s)	Low flow cut off (v ~ 0.04 m/s)
2"	50	10 to 300 gal/min	75 gal/min	0.50 gal	1.25 gal/min
–	65	16 to 500 gal/min	130 gal/min	1 gal	2.0 gal/min
3"	80	24 to 800 gal/min	200 gal/min	2 gal	2.5 gal/min
4"	100	40 to 1250 gal/min	300 gal/min	2 gal	4.0 gal/min
–	125	60 to 1950 gal/min	450 gal/min	5 gal	7.0 gal/min
6"	150	90 to 2650 gal/min	600 gal/min	5 gal	12 gal/min
8"	200	155 to 4850 gal/min	1200 gal/min	10 gal	15 gal/min
10"	250	250 to 7500 gal/min	1500 gal/min	15 gal	30 gal/min
12"	300	350 to 10600 gal/min	2400 gal/min	25 gal	45 gal/min
14"	350	500 to 15000 gal/min	3600 gal/min	30 gal	60 gal/min
15"	375	600 to 19000 gal/min	4800 gal/min	50 gal	60 gal/min
16"	400	600 to 19000 gal/min	4800 gal/min	50 gal	60 gal/min

Diameter		Recommended flow rate Min./max. full scale value (v ~ 0.3 or 10 m/s)	Factory settings		
[inch]	[mm]		Full scale value Current output (v ~ 2.5 m/s)	Pulse value (~ 2 pulses/s)	Low flow cut off (v ~ 0.04 m/s)
18"	450	800 to 24000 gal/min	6000 gal/min	50 gal	90 gal/min
20"	500	1000 to 30000 gal/min	7500 gal/min	75 gal	120 gal/min
24"	600	1400 to 44000 gal/min	10500 gal/min	100 gal	180 gal/min
28"	700	1900 to 60000 gal/min	13500 gal/min	125 gal	210 gal/min
30"	–	2150 to 67000 gal/min	16500 gal/min	150 gal	270 gal/min
32"	800	2450 to 80000 gal/min	19500 gal/min	200 gal	300 gal/min
36"	900	3100 to 100000 gal/min	24000 gal/min	225 gal	360 gal/min
40"	1000	3800 to 125000 gal/min	30000 gal/min	250 gal	480 gal/min
42"	–	4200 to 135000 gal/min	33000 gal/min	250 gal	600 gal/min
48"	1200	5500 to 175000 gal/min	42000 gal/min	400 gal	600 gal/min
54"	–	9 to 300 Mgal/day	75 Mgal/day	0.0005 Mgal	1.3 Mgal/min
–	1400	10 to 340 Mgal/day	85 Mgal/day	0.0005 Mgal	1.3 Mgal/min
60"	–	12 to 380 Mgal/day	95 Mgal/day	0.0005 Mgal	1.3 Mgal/min
–	1600	13 to 450 Mgal/day	110 Mgal/day	0.0008 Mgal	1.7 Mgal/min
66"	–	14 to 500 Mgal/day	120 Mgal/day	0.0008 Mgal	2.2 Mgal/min
72"	1800	16 to 570 Mgal/day	140 Mgal/day	0.0008 Mgal	2.6 Mgal/min
78"	–	18 to 650 Mgal/day	175 Mgal/day	0.0010 Mgal	3.0 Mgal/min
–	2000	20 to 700 Mgal/day	175 Mgal/day	0.0010 Mgal	2.9 Mgal/day
84"	–	24 to 800 Mgal/day	190 Mgal/day	0.0011 Mgal	3.2 Mgal/day
–	2200	26 to 870 Mgal/day	210 Mgal/day	0.0012 Mgal	3.4 Mgal/day
90"	–	27 to 910 Mgal/day	220 Mgal/day	0.0013 Mgal	3.6 Mgal/day
–	2400	31 to 1030 Mgal/day	245 Mgal/day	0,0014 Mgal	4,1 Mgal/day


Pressure loss

- No pressure loss if the sensor is installed in a pipe with the same nominal diameter.
- Pressure losses for configurations incorporating adapters according to DIN EN 545 (→  13, Section "Adapters").

Mechanical construction

Design, dimensions

Transmitter, remote version

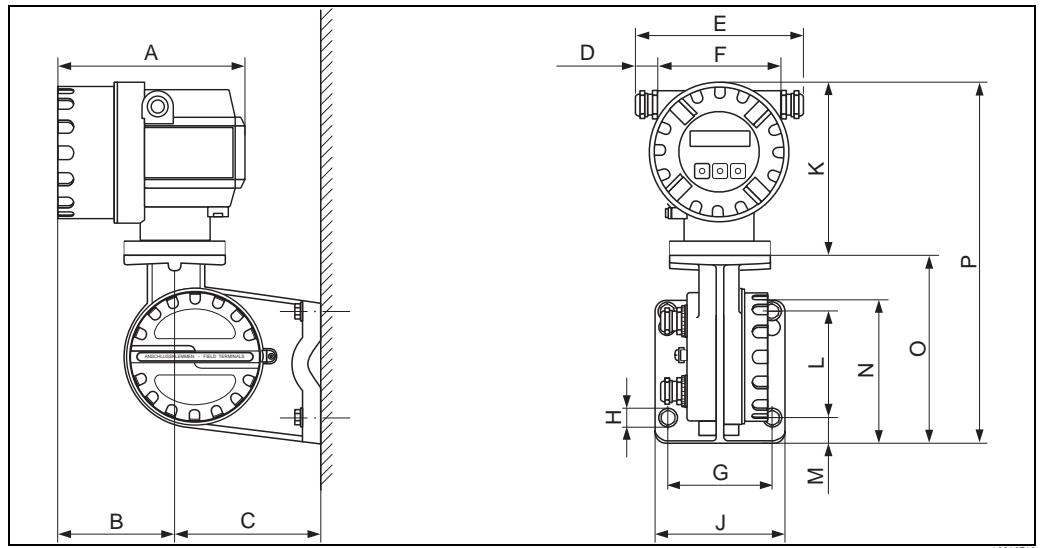

Transmitter dimensions, remote version

Dimensions in SI units


A	B	C	D	E	F	G	Ø H
178	113	135	20 to 30	161 to 181	113	100	8.6 (M8)
J	K	L	M	N	O	P	
123	150	100	25	133	177.5	327.5	

All dimensions in [mm]

Dimensions in US units

A	B	C	D	E	F	G	Ø H
7.00	4.45	5.31	0.79 to 1.81	6.34 to 7.13	4.44	3.94	0.34 (M8)
J	K	L	M	N	O	P	
4.84	5.90	3.94	0.98	5.24	6.99	12.89	


All dimensions in [inch]

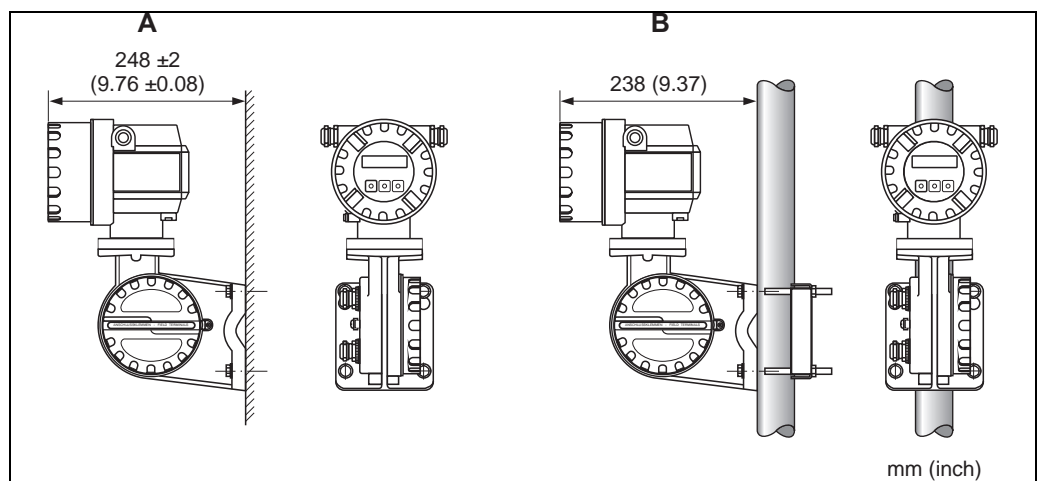

Transmitter mounting, remote version

- A Direct wall mounting
- B Pipe mounting

Sensor, remote version, DN 50 to 300

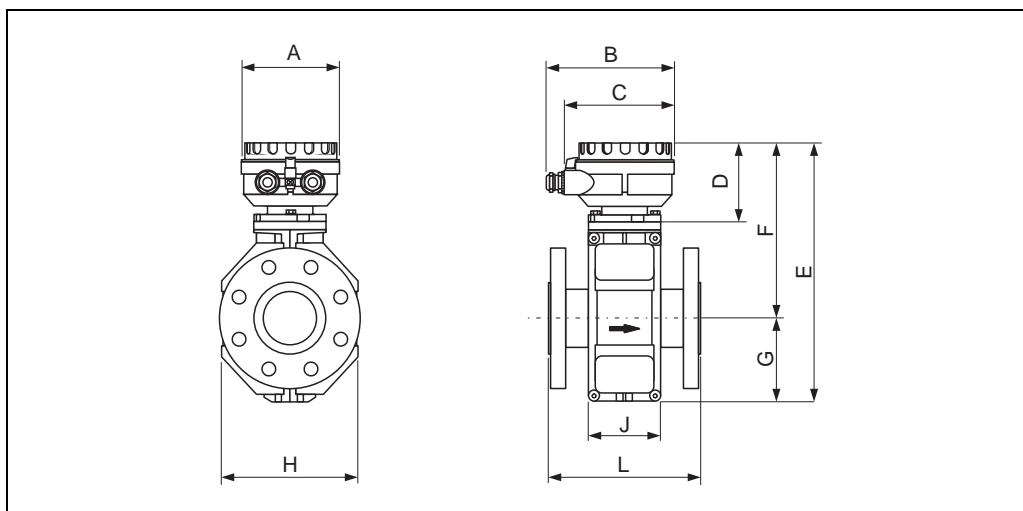

A0012462

Dimensions in SI units

DN	L ¹⁾	A	B	C	D	E	F	G	H	J
50	200	129	163	143	102	286	202	84	120	94
65	200					336	227	109	180	94
80	200					336	227	109	180	94
100	250					336	227	109	180	94
125	250					417	267	150	260	140
150	300					417	267	150	260	140
200	350					472	292	180	324	156
250	450					522	317	205	400	156
300	500					572	342	230	460	166


¹⁾ The length (L) is regardless of the pressure rating selected. Fitting length to DVGW.
All dimensions in [mm]

Dimensions in US units

DN	L ¹⁾	A	B	C	D	E	F	G	H	J
2"	7.87	5.08	6.42	5.63	4.02	11.3	7.95	3.32	4.72	3.70
3"	7.87					13.2	8.94	4.30	7.10	3.70
4"	9.84					13.2	8.94	4.30	7.10	3.70
6"	11.8					16.4	10.5	5.91	10.2	5.51
8"	13.8					18.6	11.5	7.10	12.8	6.14
10"	17.7					20.6	12.5	8.08	15.8	6.14
12"	19.7					22.5	13.5	9.06	18.1	6.54

¹⁾ The length (L) is regardless of the pressure rating selected. Fitting length to DVGW.
All dimensions in [inch]

Sensor, remote version, DN 350 to 2400

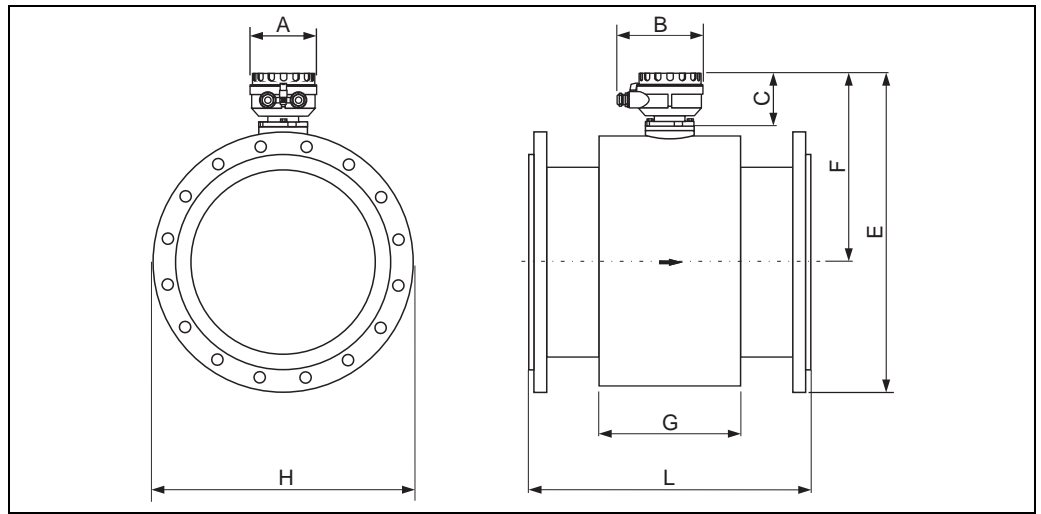

A0014987

Dimensions in SI units

DN	L	A	B	C	F	G
350	550	129	163	102	353	290
375	600				379	290
400	600				379	290
450	600				407	290
500	600				432	290
600	600				473	290
700	700				538	424
750	750				575	454
800	800				594	500
900	900				644	580
1000	1000				694	660
1050	1050				730	755
1200	1200				808	828
1350	1350				920	1008
1400	1400				920	1008
1500	1500				1020	1147
1600	1600				1020	1147
1650	1650				1071	1284
1800	1800				1128	1379
2000	2000				1239	1569
2150	2150	1339	1711			
2200	2200	1339	1711			
2300	2300	1444	1859			
2400	2400	1444	1859			

All dimensions in [mm]

DN	E with pressure rating				H with pressure rating			
	PN 6	PN 10	ANSI AWWA	AS	PN 6	PN 10	ANSI AWWA	AS
350	598	605	620	615	490	505	533	525
375	–	–	–	654	–	–	–	550
400	649	661	677	669	540	565	597	580
450	704	714	724	727	595	615	635	640
500	754	767	781	784	645	670	699	705
600	850	863	879	885	755	780	813	825
700	968	985	1001	993	860	895	927	910
750	–	–	1067	1073	–	–	984	995
800	1082	1102	1124	1124	975	1015	1060	1060
900	1182	1202	1228	1232	1075	1115	1168	1175
1000	1282	1309	1339	1322	1175	1230	1289	1255
1050	–	–	1403	–	–	–	1346	–
1200	1511	1536	1564	1553	1405	1455	1511	1490
1350	–	–	1762	–	–	–	1683	–
1400	1735	1758	–	–	1630	1675	–	–
1500	–	–	1947	–	–	–	1854	–
1600	1935	1978	–	–	1830	1915	–	–
1650	–	–	2087	–	–	–	2032	–
1800	2150	2185	2226	–	2045	2115	2197	–
2000	2371	2401	2420	–	2265	2325	2362	–
2150	–	–	2606	–	–	–	2534	–
2200	2576	2614	–	–	2475	2550	–	–
2300	–	–	2796	–	–	–	2705	–
2400	2786	2824	–	–	2685	2760	–	–

All dimensions in [mm]

Dimensions in US units


DN	L	A	B	C	F	G
14"	21.7	5.08	6.42	4.02	13.9	11.4
15"	23.6				14.9	11.4
16"	23.6				14.9	11.4
18"	23.6				16.0	11.4
20"	23.6				17.0	11.4
24"	23.6				18.6	11.4
28"	27.6				21.2	16.7
30"	29.5				22.6	17.9
32"	31.5				23.4	19.7
36"	35.4				25.4	22.8
40"	39.4				27.3	26.0
42"	41.3				28.7	29.7
48"	47.2				31.8	32.6
54"	53.2				36.2	39.7
60"	59.1				40.2	45.2
66"	65.0				42.2	50.6
72"	70.9				44.4	54.3
78"	78.7				48.8	61.8
84"	84.7				52.7	67.4
90"	90.6				56.8	73.2

All dimensions in [inch]

DN	E with pressure rating				H with pressure rating			
	PN 6	PN 10	ANSI AWWA	AS	PN 6	PN 10	ANSI AWWA	AS
14"	23.5	23.8	24.4	24.2	19.3	19.9	21.0	20.7
15"	–	–	–	25.7	–	–	–	21.7
16"	25.6	26.0	26.7	26.3	21.3	22.2	23.5	22.8
18"	27.7	28.1	28.5	28.6	23.4	24.2	25.0	25.2
20"	29.7	30.2	30.7	30.9	25.4	26.4	27.5	27.8
24"	33.5	34.0	34.6	34.8	29.7	30.7	32.0	32.5
28"	38.1	39.0	39.6	39.3	33.9	35.2	36.5	35.8
30"	–	–	42.2	42.4	–	–	38.7	39.2
32"	42.6	43.6	44.4	44.4	38.4	40.0	41.7	41.7
36"	46.5	47.5	48.5	48.7	42.3	43.9	46.0	46.3
40"	50.5	51.7	52.9	52.2	46.3	48.4	50.7	49.4
42"	–	–	55.4	–	–	–	53.0	–
48"	59.5	60.6	61.8	61.3	55.3	57.3	59.5	58.7
54"	–	–	69.4	–	–	–	66.3	–
60"	–	–	76.7	–	–	–	73.0	–
66"	–	–	82.2	–	–	–	80.0	–
72"	84.7	86.0	87.66	–	80.5	83.3	86.5	–
78"	93.4	94.5	95.3	–	89.2	91.5	93.0	–
84"	–	–	102.6	–	–	–	99.8	–
90"	–	–	110.1	–	–	–	106.5	–

All dimensions in [inch]

Compact version, DN 50 to 300

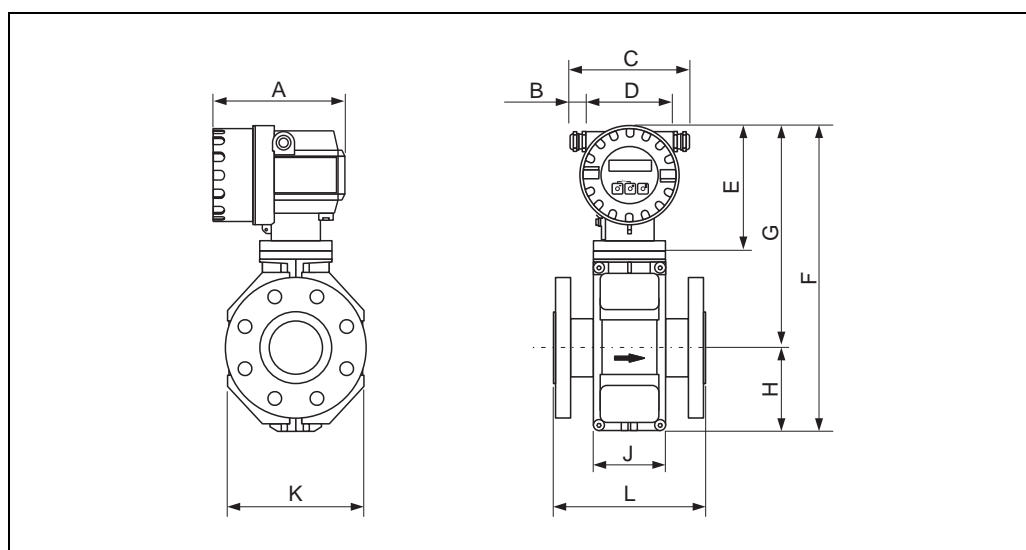

A0012464

Dimensions in SI units

DN	L ¹⁾	A	B	C	D	E	F	G	H	J	K
50	200	178	20 to 30	153 to 168	121	150	341	257	84	94	120
65	200						391	282	109	94	180
80	200						391	282	109	94	180
100	250						391	282	109	94	180
125	250						472	322	150	140	260
150	300						472	322	150	140	260
200	350						527	347	180	156	324
250	450						577	372	205	156	400
300	500						627	397	230	166	460


¹⁾ The length (L) is regardless of the pressure rating selected. Fitting length to DVGW.
All dimensions in [mm]

Dimensions in US units

DN	L ¹⁾	A	B	C	D	E	F	G	H	J	K
2"	7.87	7.01	0.79 to 1.81	6.02 to 6.61	4.76	5.91	13.4	10.1	3.32	3.70	4.72
–	7.87						15.4	11.1	4.30	3.70	7.10
3"	7.87						15.4	11.1	4.30	3.70	7.10
4"	9.84						15.4	11.1	4.30	3.70	7.10
–	9.84						18.6	12.7	5.91	5.51	10.2
6"	11.8						18.6	12.7	5.91	5.51	10.2
8"	13.8						20.8	13.7	7.10	6.14	12.8
10"	17.7						22.7	14.7	8.08	6.14	15.8
12"	19.7						24.7	15.6	9.06	6.54	18.1

¹⁾ The length (L) is regardless of the pressure rating selected. Fitting length to DVGW.
All dimensions in [inch]

Compact version DN 350 to 2400

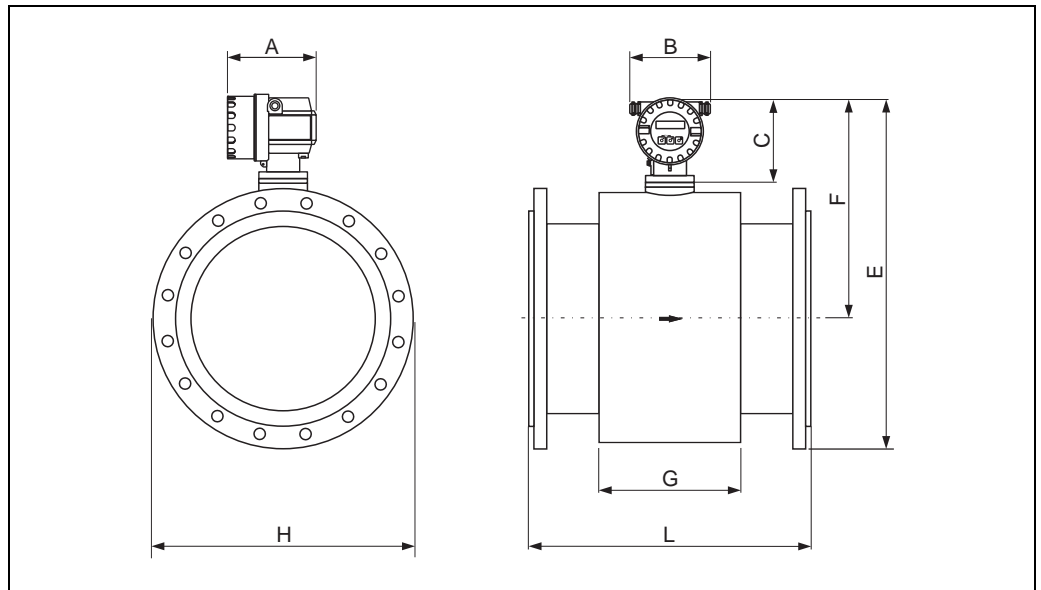

A0014993

Dimensions in SI units

DN	L	A	B	C	F	G
350	550	178	161 to 181	150	401	290
375	600				427	290
400	600				427	290
450	600				455	290
500	600				480	290
600	600				521	290
700	700				591	424
750	750				628	454
800	800				647	500
900	900				697	580
1000	1000				747	660
1050	1050				783	755
1200	1200				861	828
1350	1350				920	1008
1400	1400				920	1008
1500	1500				1020	1147
1600	1600				1020	1147
1650	1650				1071	1284
1800	1800				1128	1379
2000	2000				1239	1569
2150	2150	1339	1711			
2200	2200	1339	1711			
2300	2300	1444	1859			
2400	2400	1444	1859			

All dimensions in [mm]

DN	E at pressure rating:				H at pressure rating:			
	PN 6	PN 10	ANSI AWWA	AS	PN 6	PN 10	ANSI AWWA	AS
350	646	653	668	663	490	505	533	525
375	–	–	–	702	–	–	–	550
400	697	709	725	717	540	565	597	580
450	752	762	772	775	595	615	635	640
500	802	815	829	832	645	670	699	705
600	898	911	927	933	755	780	813	825
700	1021	1038	1054	1046	860	895	927	910
750	–	–	1120	1126	–	–	984	995
800	1135	1155	1177	1177	975	1015	1060	1060
900	1235	1255	1281	1284	1075	1115	1168	1175
1000	1335	1362	1392	1374	1175	1230	1289	1255
1050	–	–	1456	–	–	–	1346	–
1200	1564	1588	1617	1606	1405	1455	1511	1490
1350	–	–	1762	–	–	–	1683	–
1400	1735	1758	–	–	1630	1675	–	–
1500	–	–	1947	–	–	–	1854	–
1600	1935	1978	–	–	1830	1915	–	–
1650	–	–	2087	–	–	–	2032	–
1800	2150	2185	2226	–	2045	2115	2197	–
2000	2371	2401	2420	–	2265	2325	2362	–
2150	–	–	2606	–	–	–	2534	–
2200	2576	2614	–	–	2475	2550	–	–
2300	–	–	2796	–	–	–	2705	–
2400	2786	2824	–	–	2685	2760	–	–

All dimensions in [mm]

Dimensions in US units


DN	L	A	B	C	F	G
14"	21.6	7.00	6.34 to 7.13	5.91	15.8	11.4
15"	23.6				16.8	11.4
16"	23.6				16.8	11.4
18"	23.6				17.9	11.4
20"	23.6				18.9	11.4
24"	23.6				20.5	11.4
28"	27.6				23.2	16.7
30"	29.5				24.7	17.9
32"	31.5				25.5	19.7
36"	35.4				27.4	22.8
40"	39.4				29.4	26.0
42"	41.3				30.8	29.7
48"	47.2				33.9	32.6
54"	53.1				36.2	39.7
60"	59.0				40.2	45.27
66"	64.9				42.2	50.6
72"	70.8				44.4	54.3
78"	78.7				48.8	61.8
84"	84.6				52.7	67.3
90"	90.5				56.9	73.2

All dimensions in [inch]

DN	E at pressure rating:				H at pressure rating:			
	PN 6	PN 10	ANSI AWWA	AS	PN 6	PN 10	ANSI AWWA	AS
14"	25.4	25.7	26.3	26.1	19.3	19.9	21.0	20.7
15"	-	-	-	27.6	-	-	-	21.7
16"	27.4	27.9	28.5	28.2	21.3	22.2	23.5	22.8
18"	29.8	30.0	30.4	30.5	23.4	24.2	25.0	25.2
20"	31.6	32.0	32.6	32.8	25.4	26.4	27.5	27.8
24"	35.4	35.9	36.5	36.7	29.7	30.7	32.0	32.5
28"	40.2	40.93	41.5	41.2	33.9	35.2	36.5	35.8
30"	-	-	44.1	44.3	-	-	38.7	39.2
32"	44.7	45.5	46.3	46.3	38.4	40.0	41.7	41.7
36"	48.6	49.4	50.4	50.6	42.3	43.9	46.0	46.3
40"	52.5	53.6	54.8	54.1	46.3	48.4	50.7	49.4
42"	-	-	57.3	-	-	-	53.0	-
48"	61.6	62.5	63.6	63.2	55.3	57.3	59.5	58.7
54"	-	-	71.3	-	-	-	66.3	-
60"	-	-	78.5	-	-	-	72.9	-
66"	-	-	84.0	-	-	-	80.0	-
72"	86.5	87.9	89.5	-	80.5	83.2	86.5	-
78"	95.2	96.4	97.2	-	89.1	91.5	92.9	-
84"	-	-	104.5	-	-	-	-	99.7
90"	-	-	111.9	-	-	-	-	106.5

All dimensions in [inch]

Ground disk

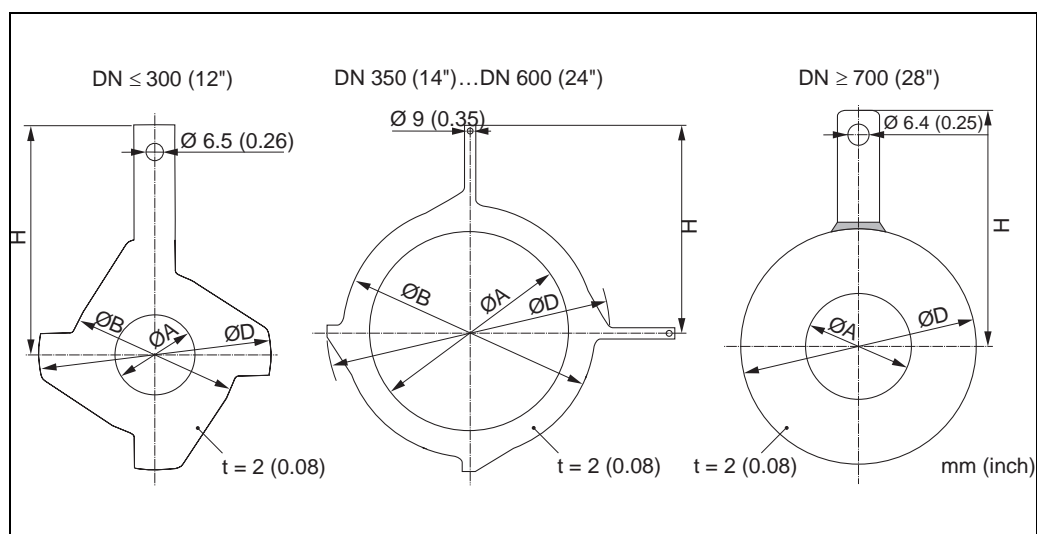

A0015442

Dimensions in SI and US units

DN		Pressure rating	A		B		D		H	
[mm]	[inch]		[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
50	2"	1)	52	2.05	101	3.98	115.5	4.55	108	4.25
65	2 1/2"	1)	68	2.68	121	4.76	131.5	5.18	118	4.65
80	3"	1)	80	3.15	131	5.16	154.5	6.08	135	5.31
100	4"	1)	104	4.09	156	6.14	186.5	7.34	153	6.02
125	5"	1)	130	5.12	187	7.36	206.5	8.13	160	6.30
150	6"	1)	158	6.22	217	8.54	256	10.08	184	7.24
200	8"	1)	206	8.11	267	10.51	288	11.34	205	8.07
250	10"	1)	260	10.24	328	12.91	359	14.13	240	9.45
300	12"	1)	312	12.28	375	14.76	413	16.26	273	10.75
350	14"	DIN, PN 6	343	13.50	433	16.54	479	18.86	365	14.37
		DIN, PN 10			420	17.05				
		ANSI, Cl.150								
400	16"	DIN, PN 6	393	15.47	470	18.50	542	21.34	395	15.55
		DIN, PN 10			480	18.90				
		ANSI, Cl.150								
450	18"	DIN, PN 6	439	17.28	525	20.67	583	22.95	417	16.42
		DIN, PN 10			538	21.18				
		ANSI, Cl.150								
500	20"	DIN, PN 6	493	19.41	575	23.31	650	25.59	460	18.11
		DIN, PN 10			592	22.64				
		ANSI, Cl.150								
600	24"	DIN, PN 6	593	23.35	676	27.28	766	30.16	522	20.55
		DIN, PN 10			693	26.61				
		ANSI, Cl.150								

DN		Pressure rating	A		B		D		H	
[mm]	[inch]		[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
700	28"	DIN, PN 6	697	27.44	–	–	786	30.94	460	18.11
		DIN, PN 10	693	27.28	–	–	813	32.01	480	18.9
		AS, PN 16	687	27.05	–	–	807	31.77	490	19.29
		AWWA, Class D	693	27.28	–	–	832	32.76	494	19.45
750	30"	AS, PN 16								
		AWWA, Class D	743	29.25	–	–	833	32.8	523	20.59
800	32"	DIN, PN 6	799	31.46	–	–	893	35.16	520	20.47
		DIN, PN 10	795	31.30	–	–	920	36.22	540	21.26
		AS, PN 16	789	31.06	–	–	914	35.98	550	21.65
		AWWA, Class D	795	31.30	–	–	940	37.01	561	22.09
900	36"	DIN, PN 6	897	35.31	–	–	993	39.09	570	22.44
		DIN, PN 10	893	35.16	–	–	1020	40.16	590	23.23
		AS, PN 16	886	34.88	–	–	1014	39.92	595	23.43
		AWWA, Class D	893	35.16	–	–	1048	41.26	615	24.21
1000	40"	DIN, PN 6	999	39.33	–	–	1093	43.03	620	24.41
		DIN, PN 10	995	39.17	–	–	1127	44.37	650	25.59
		AS, PN 16	988	38.90	–	–	1131	44.53	660	25.98
		AWWA, Class D	995	39.17	–	–	1163	45.79	675	26.57
1050	42"	AWWA, Class D	1044	41.10	–	–	1220	48.03	704	27.72
1200	48"	DIN, PN 6	1203	47.36	–	–	1310	51.57	733	28.86
		DIN, PN 10	1196	47.09	–	–	1344	52.91	760	29.92
		AS, PN 16	1196	47.09	–	–	1385	54.53	786	30.94
		AWWA, Class D	1188	46.77	–	–	1345	52.95	775	30.51

1) Ground disks can be used for all flange norms/ pressure ratings.

Weight

SI units

Compact version (lap joint flanges / welded flanges DN >300)

Nominal diameter		Compact version (including transmitter)									
[mm]	[inch]	EN (DIN)		EN (DIN)		ANSI / AWWA		AS			
50	2"	PN 16	9.0	PN 6	–	ANSI / Class 150	9.00	PN 16	–	Table E	–
65	2 ½"		10.4		–		–		–		
80	3"		12.4		–		12.4		–		
100	4"		14.4		–		14.4		–		
125	5"		19.9		–		–		–		
150	6"		23.9		–		23.9		–		
200	8"		43.4		–		43.4		–		
250	10"	63.4	–	63.4	–						
300	12"	68.4	–	68.4	–						
350	14"	88.4	77.4	137.4	99,4	99.4					
375	15"	–	–	–	105,4	–					
400	16"	104.4	89.4	168.4	120,4	120.4					
450	18"	112.4	99.4	191.4	133,4	143,4					
500	20"	132.4	114.4	228.4	182,4	182.4					
600	24"	162.4	155.4	302.4	260,4	260.4					
700	28"	240	190	266	367	346					
750	30"	–	–	318	445	433					
800	32"	315	240	383	503	493					
900	36"	393	308	470	702	690					
1000	40"	468	359	587	759	761					
–	42"	–	–	670	–	–					
1200	48"	717	529	901	–	1237					
–	54"	–	–	1273	–	–					
1400	–	1114	784	–	–	–					
–	60"	–	–	1594	–	–					
1600	–	1624	1058	–	–	–					
1650	66"	–	–	2131	–	–					
1800	72"	2107	1418	2568	–	–					
2000	78"	2630	1877	3113	–	–					
–	84"	–	–	3755	–	–					
2200	–	3422	2512	–	–	–					
–	90"	–	–	4797	–	–					
2400	–	4094	2996	–	–	–					

Transmitter Promag (compact version): 1.8 kg
(Weight data valid without packaging material)

Remote version (lap joint flanges / welded flanges DN >300)

Weight data in kg															
Nominal diameter		Remote version													
		(sensor plus sensor housing without cable)													
[mm]	[inch]	EN (DIN)	EN (DIN)	ANSI / AWWA	AS										
50	2"	PN 16	5.7	-	ANSI / Class 150	5.7	-	-	-	-	-				
65	2 1/2"		7.1			-						-	-		
80	3"		9.1			-						9.1	-	-	-
100	4"		11.1			-						11.1	-	-	-
125	5"		16.6			-						-	-	-	-
150	6"		20.6			-						20.6	-	-	-
200	8"	PN 10	40.1	PN 6	AWWA / Class D	40.1	PN 16	-	-	-	-				
250	10"		60.1			-						60.1	-	-	-
300	12"		65.1			-						65.1	-	-	-
350	14"		84.1			73.1						133.1	95.1	95.1	95.1
375	15"		-			-						-	101.1	-	-
400	16"		100.1			85.1						164.1	116.1	116.1	116.1
450	18"		108.1			95.1						187.1	129.1	129.1	139.1
500	20"		128.1			110.1						224.1	178.1	178.1	178.1
600	24"		158.1			158.1						298.1	256.1	256.1	256.1
700	28"		237			187						263	364	364	343
750	30"		-			-						315	442	442	430
800	32"		312			237						380	500	500	490
900	36"		390			305						467	699	699	687
1000	40"		465			356						584	756	756	758
1050	42"	-	-	667	-	-	-								
1200	48"	714	526	898	1216	1216	1234								
-	54"	-	-	1270	-	-	-								
1400	-	1111	781	-	-	-	-								
-	60"	-	-	1591	-	-	-								
1600	-	1621	1055	-	-	-	-								
1650	66"	-	-	2128	-	-	-								
1800	72"	2104	1415	2565	-	-	-								
2000	78"	2627	1874	3110	-	-	-								
-	84"	-	-	3752	-	-	-								
2200	-	3419	2509	-	-	-	-								
-	90"	-	-	4794	-	-	-								
2400	-	4091	2993	-	-	-	-								

Transmitter Promag (remote version): 3.1 kg
(Weight data valid without packaging material)

Lap joint flanges, stamped plate

Weight data in kg						
Nominal diameter		Compact version		Remote version (without cable)		
[mm]	[inch]	EN (DIN)		Sensor EN (DIN)		Transmitter
50	2"	PN 10	5.4	PN 10	3.4	4.2
65	2 1/2"		6.2		4.2	4.2
80	3"		7.2		5.2	4.2
100	4"		9.7		7.7	4.2
125	5"		13.2		11.2	4.2
150	6"		17.2		15.2	4.2
200	8"		35.7		33.7	4.2
250	10"		54.2		52.2	4.2
300	12"	55.2	53.2	4.2	4.2	

Transmitter Promag (compact version): 1.8 kg
(Weight data valid for standard pressure ratings and without packaging material)

US units

ANSI / AWWA (lap joint flanges / welded flanges DN >300)

Weight data in lbs		Compact version		Remote version (without cable)	
Nominal diameter		ANSI / AWWA		ANSI / AWWA	
[mm]	[inch]				
50	2"	ANSI / Class 150	19.4	ANSI / Class 150	19
65	2 ½"		–		–
80	3"		27.4		26
100	4"		31.4		31
125	5"		–		–
150	6"		52.4		52
200	8"		95.4		95
250	10"		139.4		139
300	12"		239.4		238
350	14"		302.4		294.8
375	15"		–		–
400	16"		371.4		262.8
450	18"		421.4		413.8
500	20"		503.4		494.8
600	24"		666.4		657.8
700	28"	AWWA / Class D	607.4	AWWA / Class D	599.8
750	30"		721.4		714.8
800	32"		869.4		862.8
900	36"		1059.4		1051.8
1000	40"		1320.4		1313.8
1050	42"		1504.4		1497.8
1200	48"		2011.4		2004.8
–	54"		2807		2800,4
1400	–		–		–
–	60"		3514,8		3508,2
1600	–		–		–
1650	66"		4698,9		4692,2
1800	72"		5662,4		5655,8
2000	78"		6864,2		6857,6
–	84"		8279,8		8273,2
2200	–	–	–		
–	90"	10577	10571		

Transmitter Promag (compact version): 3.9 lbs
Transmitter Promag (remote version): 6.8 lbs
(Weight data valid without packaging material)

Measuring tube specifications Internal diameter for pressure rating EN (DIN), AS 2129, AS 4087, ANSI and AWWA

Nominal diameter		Pressure rating			Internal diameter measuring tube						
		EN (DIN)	AS 2129 AS 4087	ANSI AWWA	Hard rubber		Polyurethane		PTFE		
[mm]	[inch]				[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	
50	2"	PN 10/16		Class 150	-	-	50.3	2.0	51.7	2.0	
65*	2"	PN 10/16		Class 150	-	-	66.1	2.6	67.7	2.7	
80	3"	PN 10/16		Class 150	-	-	78.9	3.1	79.9	3.1	
100	4"	PN 10/16		Class 150	-	-	104.3	4.1	103.8	4.1	
125	5"	PN 10/16		Class 150	-	-	129.7	5.1	129.1	5.1	
150	6"	PN 10/16		Class 150	-	-	158.3	6.2	156.3	6.2	
200	8"	PN 10/16		Class 150	-	-	206.7	8.1	202.1	8.0	
250	10"	PN 10/16		Class 150	-	-	260.6	10.3	256.2	10.1	
300	12"	PN 10/16			-	-	311.5	12.3	305.5	12.0	
				Class 150	-	-	309.9	12.2	303.9	12.0	
350	14"	PN 6			341	13.4	344	13.5	-	-	
		PN 10			341	13.4	344	13.5	-	-	
			PN 16 Table E			339	13.3	342	13.4	-	-
				Class 150		339	13.3	342	13.4	-	-
375	15"	PN 10			391	15.4	-	-	-	-	
			PN 16	-	389	15.3	392	15.4	-	-	
400	16"	PN 6			391	15.4	394	13.5	-	-	
		PN 10			442	17.4	394	13.5	-	-	
			PN 16 Table E			389	15.3	392	13.4	-	-
				Class 150		389	15.3	392	13.4	-	-
450	18"	PN 6			442	17.4	445	17.5	-	-	
		PN 10			493	19.4	445	17.5	-	-	
			PN 16 Table E			440	17.3	443	17.4	-	-
				Class 150		438	17.2	441	17.3	-	-
500	20"	PN 6			493	19.4	496	19.5	-	-	
		PN 10			595	23.4	496	19.5	-	-	
			PN 16 Table E			489	19.2	492	19.3	-	-
				Class 150		489	19.2	492	19.3	-	-
600	24"	PN 6			595	23.4	598	23.5	-	-	
		PN 10			590	23.2	598	23.5	-	-	
			PN 16 Table E			591	23.2	594	23.4	-	-
				Class 150		589	23.1	592	23.3	-	-
700	28"	PN 6			696	27.4	699	27.5	-	-	
		PN 10			694	27.3	697	27.4	-	-	
			PN 16 Table E			690	27.2	693	27.3	-	-
				Class D		694	27.3	697	27.4	-	-
750	30"	PN 6			-	-	699	27.5	-	-	
		PN 10			-	-	697	27.4	-	-	
			PN 16 Table E			741	29.2	744	29.3	-	-
				Class D		743	29.3	746	29.4	-	-

Nominal diameter		Pressure rating			Internal diameter measuring tube					
		EN (DIN)	AS 2129 AS 4087	ANSI AWWA	Hard rubber		Polyurethane		PTFE	
[mm]	[inch]				[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
800	32"	PN 6			798	31.4	801	31.5	–	–
		PN 10			796	31.3	799	31.5	–	–
			PN 16 Table E		792	31.2	795	31.3	–	–
				Class D	794	31.3	797	31.4	–	–
900	36"	PN 6			897	35.3	900	35.4	–	–
		PN 10			895	35.2	898	35.4	–	–
			PN 16 Table E		889	35.0	892	35.1	–	–
				Class D	895	35.2	898	35.4	–	–
1000	40"	PN 6			999	39.3	1002	39.4	–	–
		PN 10			997	39.3	1000	39.4	–	–
			PN 16 Table E		991	39.0	994	39.1	–	–
				Class D	995	39.1	998	39.3	–	–
1050	42"	PN 6			–	–	–	–	–	–
		PN 10			–	–	–	–	–	–
			PN 16 Table E		–	–	–	–	–	–
				Class D	1046	41.2	1049	41.3	–	–
1200	48"	PN 6			1203	47.4	1206	47.5	–	–
		PN 10			1199	47.2	1202	47.3	–	–
			PN 16 Table E		1191	46.9	1194	47.0	–	–
				Class D	1195	47.0	1198	47.2	–	–
–	54"	–	–	–	1345	53.8	–	–	–	–
1400	–	PN 6			1402	56.1	–	–	–	–
		PN 10	–	–	1394	55.78	–	–	–	–
–	60"	0	–	Class D	1498	59.9	–	–	–	–
1600	–	PN 6			1600	64.0	–	–	–	–
		PN 10	–	–	1590	63.6	–	–	–	–
–	66"	–	–	Class D	1646	65.8	1198	47.2	–	–
1800	72"	PN 6			1800	72.0	1206	47.5	–	–
		PN 10			1790	71.6	1202	47.3	–	–
			–	Class D	1790	71.6	1198	47.2	–	–
2000	78"	PN 6			1998	79.9	–	–	–	–
		PN 10			1990	79.6	–	–	–	–
			–	Class D	1986	79.4	–	–	–	–
–	84"	–	–	Class D	2099	84.0	–	–	–	–
2200	–	PN 6			2194	87.8	–	–	–	–
		PN 10	–	–	2186	87.4	–	–	–	–
–	90"	–	–	Class D	2246	89.8	–	–	–	–
2400	–	PN 6			2394	95.8	–	–	–	–
		PN 10	–	–	2386	95.4	–	–	–	–

* Specification according EN 1092-1 (not according DIN 2501)

Material

- Transmitter housing:
 - Compact housing: powder-coated die-cast aluminum
 - Wall-mounted housing: powder-coated die-cast aluminum
- Sensor housing
 - DN 50 to 300: powder-coated die-cast aluminum
 - DN 350 to 1200: with protective lacquering
- Measuring tube:
 - DN ≤ 300; stainless steel 1.4301/304 or 1.4306/304L
 - DN ≥ 350; stainless steel 202 or 304
- Electrodes: 1.4435/304L, Alloy C-22
- Flange
 - EN 1092-1 (DIN 2501): DN ≤ 300: 1.4306/304L; 1.4307/304L; 1.4301/304; 1.0038 (S235JRG2)
 - EN 1092-1 (DIN 2501): DN ≥ 350: A105; 1.0038 (S235JRG2)
 - ANSI: A105; 316L
 - AWWA: A181/A105; 1.0425/316L (P265GH); 1.0044 (S275JR)
 - AS 2129: A105; 1.0345 (P235GH); 1.0425/316L (P265GH); 1.0038 (S235JRG2); FE 410 WB
 - AS 4087: A105; 1.0425/316L (P265GH); 1.0044 (S275JR)
- Seals: to DIN EN 1514-1
- Ground disks: 1.4435/316L or Alloy C-22

Material load diagram




Caution!

The following diagrams contain material load diagrams (reference curves) for flange materials with regard to the medium temperature. However, the maximum medium temperatures permitted always depend on the lining material of the sensor and/or the sealing material (→ 16).

Flange connection to EN 1092-1 (DIN 2501); DN ≤ 300


Material: 1.4306/304L; 1.4307/304L

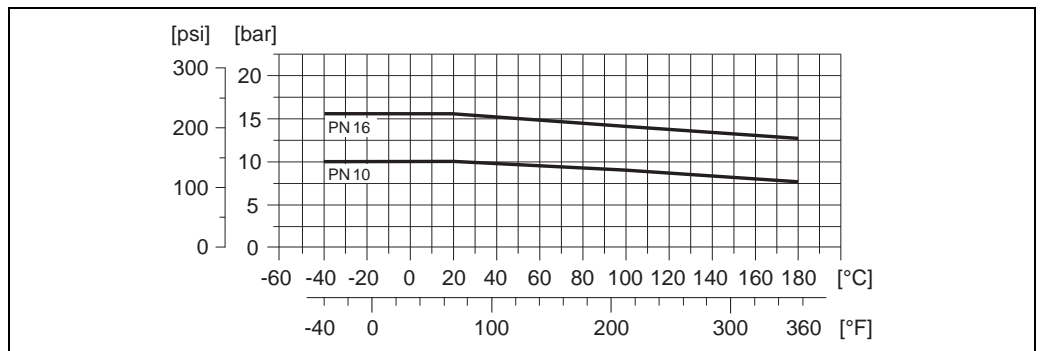

A0011571

Flange connection to EN 1092-1; DN ≤ 300


Material: 1.4301/304; lap joint flange, stamped plate

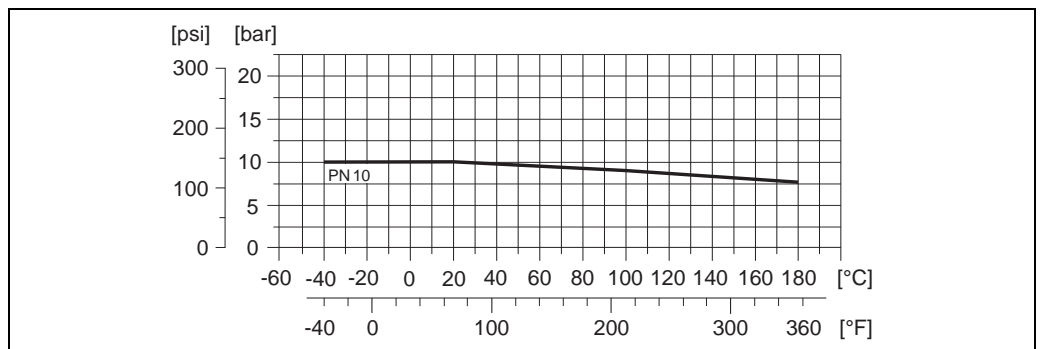

A0011573

Flange connection to EN 1092-1 (DIN 2501)


Material: A105, 1.0038 (S235)RG2); lap joint flange, stamped plate only in PN 10

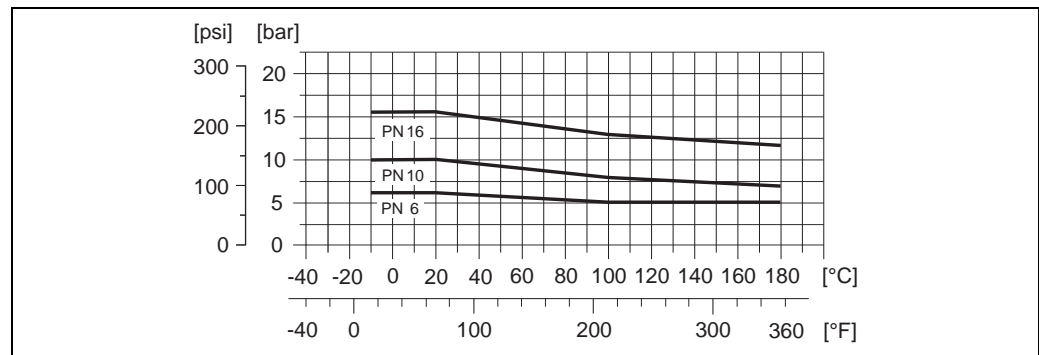

A0011568

Flange connection to ANSI B16.5, Class 150; DN ≤ 300


Material: 316L

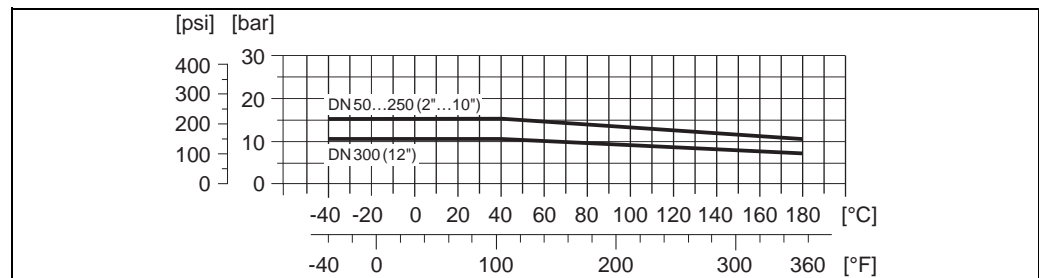

A0011580

Flange connection to ANSI B16.5, Class 150; DN ≤ 300


Material: A105

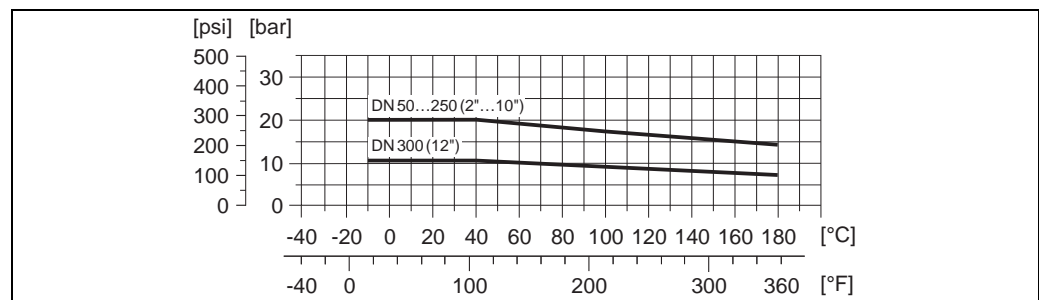

A0011572

Flange connection to AWWA C207, Class D; DN ≤ 350

Material: A181/A105; 1.0425/316L (P265GH); 1.0044 (S275JR)

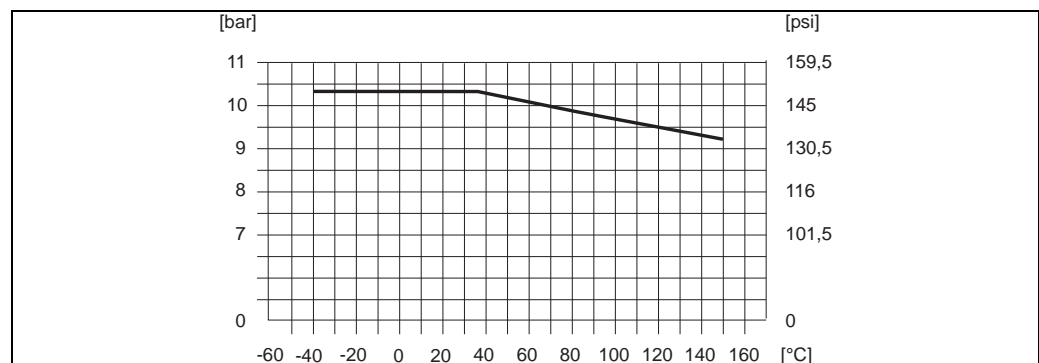


A0011572

Flange connection to AS 2129 Table E oder AS 4087 PN16; DN ≤ 350

Material:

AS 2129 Table E: A105; 1.0345 (P235GH); 1.0425/316L (P265GH); 1.0038 (S235JRG2); FE 410 WB
 AS 4087 Class D: A105; 1.0425/316L (P265GH); 1.0044 (S275JR)

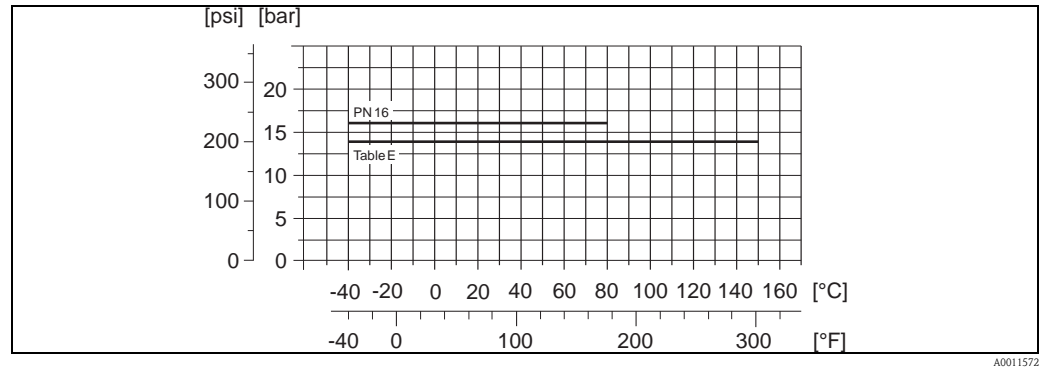

A0011572

Fitted electrodes Measuring electrodes, reference electrodes and empty pipe detection electrodes available as standard with:

- 1.4435/304L
- Alloy C-22

Process connections Flange connection:

- EN 1092-1 (DIN 2501)
(Dimensions to DIN 2501, DN 65 PN 16 exclusively to EN 1092-1)
- ANSI B16.5
- AWWA C207
- AS

Surface roughness Electrodes with 1.4435, Alloy C-22: ≤ 0.3 to 0.5 µm (≤ 11.8 to 19.7 µin)
 (All data refer to parts in contact with medium)

Human interface

Display elements

- Liquid crystal display: unilluminated, two-line, 16 characters per line
- Display (operating mode) preconfigured: volume flow and totalizer status
- 1 totalizer

Operating elements Local operation via three keys (◻, ◻, ◻)

Remote operation Operation via HART protocol and FieldCare

Certificates and approvals

CE mark The measuring system is in conformity with the statutory requirements of the EC Directives. Endress+Hauser confirms successful testing of the device by affixing to it the CE mark.

C-tick mark The measuring system meets the EMC requirements of the "Australian Communication and Media Authority (ACMA)".

Drinking water approval

- WRAS BS 6920
- ACS
- NSF 61
- KTW/W270

Other standards and guidelines

- EN 60529
Degrees of protection by housing (IP code).
- EN 61010
Protection Measures for Electrical Equipment for Measurement, Control, Regulation and Laboratory Procedures.
- IEC/EN 61326
"Emission in accordance with requirements for Class A".
Electromagnetic compatibility (EMC requirements).
- ANSI/ISA-S82.01
Safety Standard for Electrical and Electronic Test, Measuring, Controlling and related Equipment - General Requirements. Pollution degree 2, Installation Category II.
- CAN/CSA-C22.2 No. 1010.1-92
Safety requirements for Electrical Equipment for Measurement and Control and Laboratory Use.
Pollution degree 2, Installation Category II

Ordering information

Your Endress+Hauser service organization can provide detailed ordering information and information on the order codes on request.

Accessories

Various accessories, which can be ordered separately from Endress+Hauser, are available for the transmitter and the sensor. Your Endress+Hauser service organization can provide detailed information on the order codes in question.

Documentation

- Flow measurement (FA005D/06)
- Operating Instructions Promag 10 (BA00082D/06)

Registered trademarks

KALREZ® and VITON®
Registered trademarks of E.I. Du Pont de Nemours & Co., Wilmington, USA

TRI-CLAMP®
Registered trademark of Ladish & Co., Inc., Kenosha, USA

HART®
Registered trademark of the HART Communication Foundation, Austin, USA

FieldCare®, Fieldcheck®, Field Xpert™, Applicator®
Registered or registration-pending trademarks of Endress+Hauser Flowtec AG, Reinach, CH

Instruments International

Endress+Hauser
Instruments International AG
Kaegenstrasse 2
4153 Reinach
Switzerland

Tel.+41 61 715 81 00
Fax+41 61 715 25 00
www.endress.com
info@ii.endress.com

Endress+Hauser 
People for Process Automation